


MICRO SPRINKLERS MICRO EMITTERS SPRINKLERS

PRODUCT CATALOG

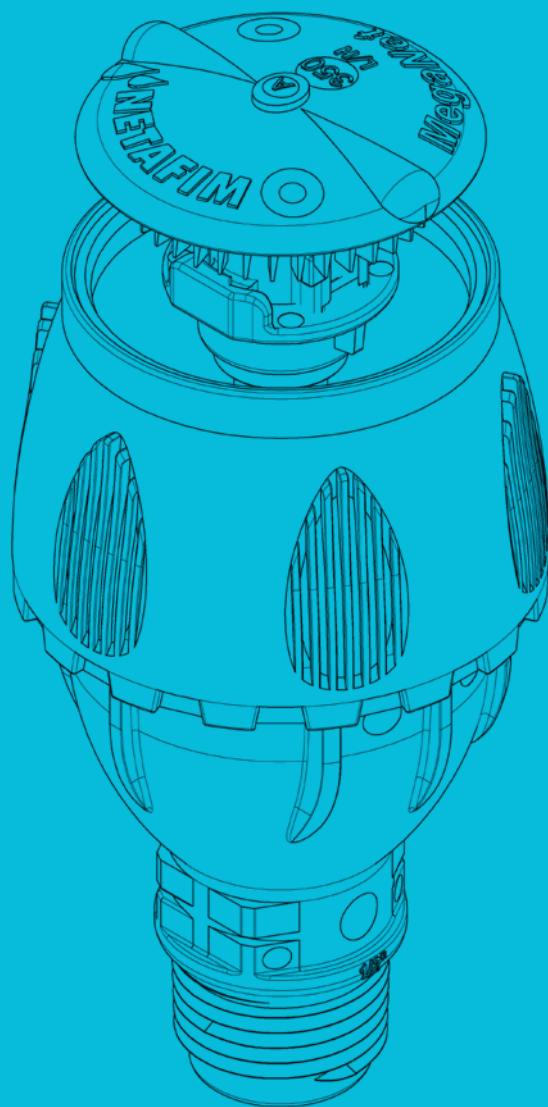

2013

Products appearing in this catalogue may be covered by one or more of the following US Patent No. 6863226 and other U.S. patents pending or corresponding issued or pending foreign patents

All rights are reserved. You are specifically prohibited and not allowed to reproduce, copy, duplicate, manufacture, supply, sell, hire, distribute or adapt all or any part of this publication including any packaging. Netafim™, are trademarks of Netafim™ Ltd., registered in the U.S. and other countries. We endeavor to provide accurate, quality and detailed information. However we cannot accept liability for your reliance on the provided information and you are advised to independently seek professional advice from Netafim™ and/or its authorized representatives. There is no undertaking by us that the provided information or any part thereof is accurate, complete or up to date .

Mention of third-party products is for informational purposes only and constitutes neither an endorsement nor a recommendation.

Netafim™ assumes no responsibility with regard to the performance or use of these products.

In no event shall Netafim™ be liable for any indirect, incidental, special or consequential damages.

CONTENTS

1) Pressure compensated Micro-sprinklers and Micro-emitters	
SuperNet™ LR & LRD	4
SuperNet™ SR & SRD	8
SuperNet™ SSR	12
SuperNet™ UD	14
SuperNet™ GS	18
SuperNet™ JET	20
StripNet™ Pro	26
Pulsar™	30
2) Micro-sprinklers and Micro-emitters	
GyroNet™ LR & LRD	34
GyroNet™ SR & SRD	38
GyroNet™ UD	42
GyroNet™ JET	46
GyroNet™ components	48
VibroNet™ SD	50
3) Micro-sprinklers and Micro-emitters Up-right stands complementary accessories	
Connectors and Stand accessories	52
4) Micro-emitters for nurseries and pot irrigation	
PC Spray Stakes	54
Spray Stake	56
5) Micro-sprinklers and Micro-emitters for protected crops	
SpinNet™	58
SpinNet™ components	61
SpinNet™ SD	62
SpinNet™ SD components	65
VibroNet™	66
VibroNet™ components	69
CoolNet™ Pro	70
MistNet™	74
CoolNet™ Pro and MistNet™ components	76
6) Micro-sprinklers and Micro-emitters Upside-down stands complementary accessories	
Connectors and Stand accessories	77
7) Sprinklers and Midi-sprinklers	
GyroNet™ Turbo	78
GyroNet™ Turbo components	80
MegaNet™	82
MegaNet™ components	84
8) Sprinklers stands complementary accessories	
connectors and stand accessories	85
9) Netafim™ Flexible pipes, PolyNet™ and FlatNet™	88
10) Micro-tubes and tubes, complementary accessories	90
11) Tools	93



SUPERNET™ LR & LRD

LONG RANGE & LONG RANGE WITH DEFLECTOR

APPLICATIONS

Irrigation of tree plantations with large root volumes.

SPECIFICATIONS

- LR means a revolving rotor irrigating a large area.
- LRD stream deflector concentrates all the water in the area surrounding the young tree during the initial growing period. When the tree grows, the stream deflector can be broken off, thus enabling extended irrigation diameter.
- Flow regulated micro-sprinkler, 9 different flow rates: 20, 30, 35, 40, 50, 58, 70, 90, 110 l/h.
Flow rates within pressure range.
- Pressure range 1.5-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
 - Barb
 - Self tapping
 - Press fit
 - 3/8" male threaded
 - 1/2" male threaded
- 2 types of upper bearing:
 - Standard - for normal water
 - Everspin™ - for harsh condition
- The rotor is colored Purple for flows of 20 to 40 l/hr, and Black for flows of 50 to 110 l/h.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities per tree, uniform distribution and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinkler nozzle.
- Regulated micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for fruit trees, orchards, deciduous and other tree crops requiring efficient water distribution.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
 - Simple, modular parts
 - Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	CONSTANT K	EXPONENT* X	WETTED DIAMETER (M)		SWIVEL (ROTOR) CODE COLOR
							LR MODEL 20 CM ABOVE GROUND	LRD MODEL 20 CM ABOVE GROUND	
020	20	Purple	0.89	1.5 - 4.0	20	0	4.5	1.5	Purple
030	30	Brown	1.14	1.5 - 4.0	30	0	6.0	1.5	Purple
035	35	Light Blue	1.20	1.5 - 4.0	35	0	6.0	1.5	Purple
040	40	Blue	1.28	1.5 - 4.0	40	0	6.0	1.5	Purple
050	50	Green	1.43	1.5 - 4.0	50	0	7.0	1.5	Black
058	58	Gray	1.55	1.5 - 4.0	58	0	7.0	1.5	Black
070	70	Black	1.73	1.5 - 4.0	70	0	7.0	2.0	Black
090	90	Orange	1.74	1.5 - 4.0	90	0	7.0	2.0	Black
110	110	Red	1.70	2.0 - 4.0	110	0	8.0	2.0	Black

*within working pressure range


PACKAGING DATA

SUPERNET™ LR & LRD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand , 60 cm micro tube length ,w/stake	100	18 x 34 x 79	8.3	20	2000	178
Complete stand , 60 cm micro tube length ,w/o stake	200	18 x 34 x 79	7.5	20	4000	162
Complete stand , 90 cm micro tube length ,w/stake	100	28 x 27 x 113	7.1	16	1600	124
Complete stand , 90 cm micro tube length ,w/o stake	200	28 x 27 x 113	6.7	16	3200	117

SUPERNET™ LONG RANGE & LONG RANGE WITH DEFLECTOR

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

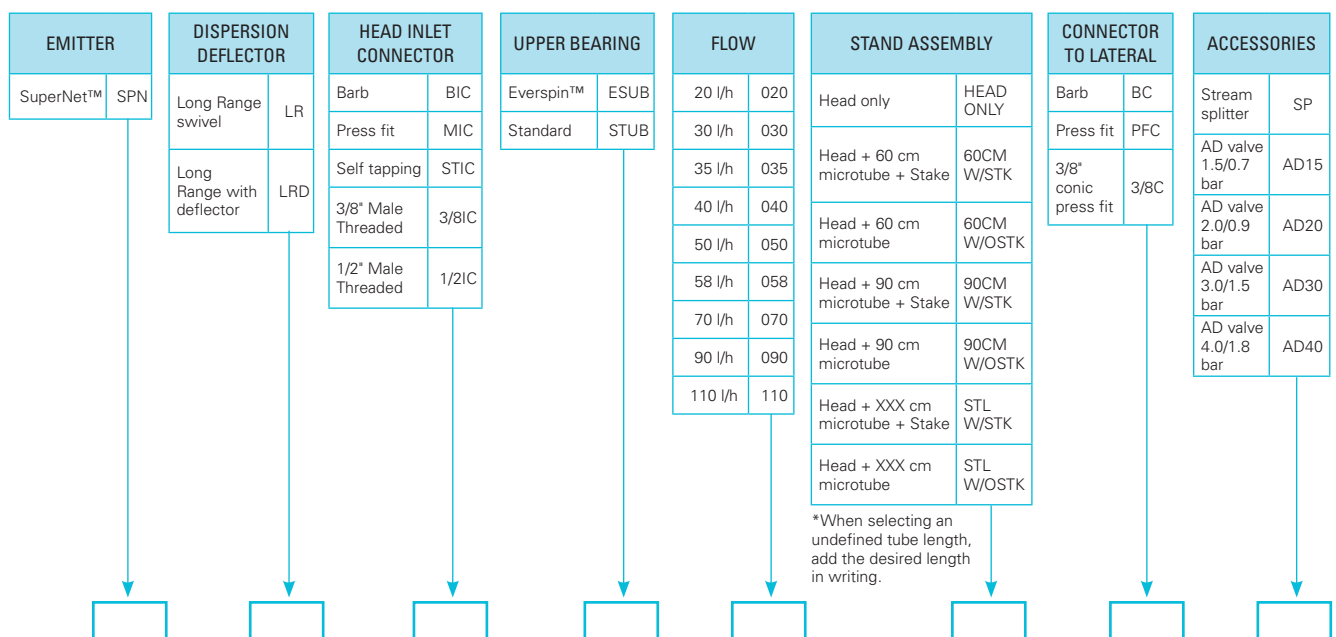

SUPERNET™ LR

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)


MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	001000	053350	113000	105350	
030	002300	054650	113600	105450	108950
035	002270	055720	114200		108920
040	003600	055950	114800	105550	109050
050	004900	057250	115500	105650	
058	006200	058550	116100	105750	109254
070	007500	059850	116700	105850	109350
090	008800	061150	117300	105950	109450
110	010100	062450	117900		109550

SUPERNET™ LR

head only with Everspin™ upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	053355	053360	113010		
030		054660	113695		
035		063730			
040		055960	114810		
050		057260	115620		
058		058560	113605	105755	109252
070		059860		105870	
090		061160	117405	105960	
110					

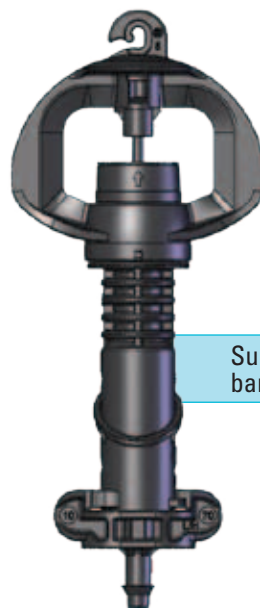

SuperNet™ LR BIC ,
barb inlet connector

SUPERNET™ LR assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN LR STIC STUB XXX 60CM W/STK BC		054850	055735	056350			060250	061550	
SPN LR STIC STUB XXX 60CM W/STK PFC				056060			060200		
SPN LR MIC STUB XXX 60CM W/STK BC							116711		
SPN LR MIC STUB XXX 60CM W/STK PFC									
SPN LR BIC STUB XXX 60CM W/STK BC		002700		004000	005300	006600	007900		010500
SPN LR BIC STUB XXX 60CM W/STK PFC			003551		005200	006500	007800	009100	010400
SPN LR STIC STUB XXX 90CM W/STK BC									
SPN LR STIC STUB XXX 90CM W/STK PFC									
SPN LR MIC STUB XXX 90CM W/STK BC									
SPN LR MIC STUB XXX 90CM W/STK PFC									
SPN LR BIC STUB XXX 90CM W/STK BC		003100		004400	005700	007000	008300		
SPN LR BIC STUB XXX 90CM W/STK PFC					005600				

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN LR STIC STUB XXX 60CM W/OSTK BC			055725	056150	057450				062650
SPN LR STIC STUB XXX 60CM W/OSTK PFC	053450	054750	055730	056050	057350	058760	059950	061250	062540
SPN LR MIC STUB XXX 60CM W/OSTK BC								117330	
SPN LR MIC STUB XXX 60CM W/OSTK PFC									
SPN LR BIC STUB XXX 60CM W/OSTK BC	001200	002500		003800	005100		007700	009000	
SPN LR BIC STUB XXX 60CM W/OSTK PFC				003700					
SPN LR STIC STUB XXX 90CM W/OSTK BC									
SPN LR STIC STUB XXX 90CM W/OSTK PFC									
SPN LR MIC STUB XXX 90CM W/OSTK BC									
SPN LR MIC STUB XXX 90CM W/OSTK PFC									
SPN LR BIC STUB XXX 90CM W/OSTK BC	001600	003160		004200			008100		010700
SPN LR BIC STUB XXX 90CM W/OSTK PFC								009300	

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

SUPERNET™ LRD

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)


MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	011360	063710	113100	106150	109650
030	013050	065050	113700	106200	109700
035		063750	114300	106230	
040	014350	066350	114900	106250	
050	015650	067650	115600	106300	
058	016950	068950	116200	106350	
070	018250	070250	116800	106400	109900
090	019550	071550	117400	106450	109950
110	020850	072850	118000	106500	

SUPERNET™ LRD

head only with Everspin™ upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	001010	063712		106155	
030		065055	113710		
035		063752	114310		
040		066360	114910		
050		067660	115610	107662	
058					
070		070260	116805		
090		071560	117410		
110			118010		

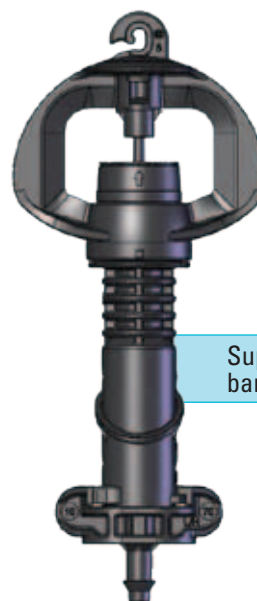

SuperNet™ LRD BIC ,
barb inlet connector

SUPERNET™ LRD assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN LRD STIC STUB XXX 60CM W/STK BC							070650		073250
SPN LRD STIC STUB XXX 60CM W/STK PFC									
SPN LRD MIC STUB XXX 60CM W/STK BC	113170	113770	114370	114970	115670	116270	116760	117470	118070
SPN LRD MIC STUB XXX 60CM W/STK PFC									
SPN LRD BIC STUB XXX 60CM W/STK BC			014201	014750				019950	
SPN LRD BIC STUB XXX 60CM W/STK PFC									
SPN LRD STIC STUB XXX 90CM W/STK BC						069750	071050	072350	
SPN LRD STIC STUB XXX 90CM W/STK PFC									
SPN LRD MIC STUB XXX 90CM W/STK BC									
SPN LRD MIC STUB XXX 90CM W/STK PFC									
SPN LRD BIC STUB XXX 90CM W/STK BC	012550			015150	016450		019050	020350	021650
SPN LRD BIC STUB XXX 90CM W/STK PFC		013850		015240	016460		019150	020250	021750

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN LRD STIC STUB XXX 60CM W/OSTK BC		065250						071565	
SPN LRD STIC STUB XXX 60CM W/OSTK PFC									
SPN LRD MIC STUB XXX 60CM W/OSTK BC	113150	113750	114350	114950	115650	116250	116850	117450	118050
SPN LRD MIC STUB XXX 60CM W/OSTK PFC									
SPN LRD BIC STUB XXX 60CM W/OSTK BC					015850				
SPN LRD BIC STUB XXX 60CM W/OSTK PFC									
SPN LRD STIC STUB XXX 90CM W/OSTK BC									073450
SPN LRD STIC STUB XXX 90CM W/OSTK PFC									
SPN LRD MIC STUB XXX 90CM W/OSTK BC									
SPN LRD MIC STUB XXX 90CM W/OSTK PFC								117500	
SPN LRD BIC STUB XXX 90CM W/OSTK BC	012350				016250		018850		
SPN LRD BIC STUB XXX 90CM W/OSTK PFC		013550		015060	016270		018870		020860

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



SUPERNET™ SR & SRD

MEDIUM RANGE & MEDIUM RANGE WITH DEFLECTOR

APPLICATIONS

Irrigation of tree plantations, and orchards where ground is shaded by the foliage, leaving dry strips between the rows.

SPECIFICATIONS

- SR means a revolving rotor irrigating a medium sized area.
- SRD stream deflector concentrates all the water in the area surrounding the young tree during the initial growing period. When the tree grows, the stream deflector can be broken off, thus enabling extended irrigation diameter.
- Flow regulated micro-sprinkler, 9 different flow rates: 20, 30, 35, 40, 50, 58, 70, 90, 110 l/h.
Flow rates within pressure range.
- Pressure range 1.5-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
Barb
Self tapping
Press fit
3/8" male threaded
1/2" male threaded
- 3 types of upper bearing:
Standard - for normal water
Everspin™ - for harsh condition
With spring - for up side down application
- The rotor is colored Blue.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities per tree, uniform distribution and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinkler nozzle.
- Regulated micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for fruit trees, orchards, deciduous and other tree crops requiring efficient water distribution.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
Simple, modular parts
Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	CONSTANT K	EXPONENT* X	WETTED DIAMETER (M)		SWIVEL (ROTOR) CODE COLOR
							SR MODEL 20 CM ABOVE GROUND	SRD MODEL 20 CM ABOVE GROUND	
020	20	Purple	0.89	1.5 - 4.0	20	0	2.5	1.8	Blue
030	30	Brown	1.14	1.5 - 4.0	30	0	3.5	1.8	Blue
035	35	Light Blue	1.20	1.5 - 4.0	35	0	3.5	1.8	Blue
040	40	Blue	1.28	1.5 - 4.0	40	0	3.5	1.8	Blue
050	50	Green	1.43	1.5 - 4.0	50	0	4.5	1.8	Blue
058	58	Gray	1.55	1.5 - 4.0	58	0	4.5	1.8	Blue
070	70	Black	1.73	1.5 - 4.0	70	0	5.0	1.8	Blue
090	90	Orange	1.74	1.5 - 4.0	90	0	5.0	2.0	Blue
110	110	Red	1.70	2.0 - 4.0	110	0	6.5	2.0	Blue

*within working pressure range


PACKAGING DATA

SUPERNET™ SR & SRD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand , 60 cm micro tube length ,w/stake	100	18 x 34 x 79	8.3	20	2000	178
Complete stand , 60 cm micro tube length ,w/o stake	200	18 x 34 x 79	7.5	20	4000	162
Complete stand , 90 cm micro tube length ,w/stake	100	28 x 27 x 113	7.1	16	1600	124
Complete stand , 90 cm micro tube length ,w/o stake	200	28 x 27 x 113	6.7	16	3200	117

SUPERNET™ SHORT RANGE & SHORT RANGE WITH DEFLECTOR

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

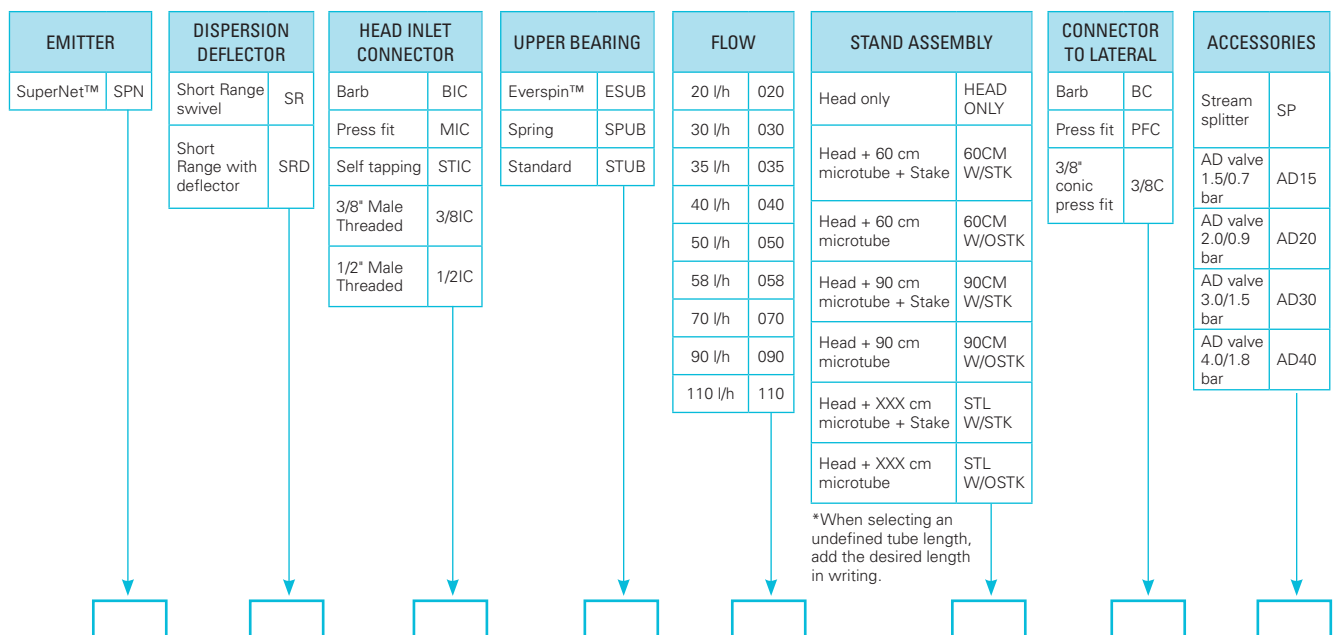


SUPERNET™ SR

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	022150	074150	118500		110050
030	023450	075450	119100		
035		075420	119700	106620	110220
040	024750	076750	120300	106750	110250
050	026050	078050	120900	106850	110350
058	027350	079350	121500	106950	
070	028650	080650	122100	107050	110550
090	029950	081950	122700		110650
110	031250	083250	123300		

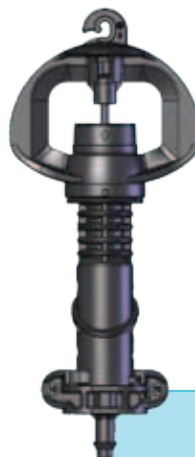

SuperNet™ SR BIC ,barb inlet connector

SUPERNET™ SR

head only with Everspin™ upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020		074152			
030		075455			
035		063800		106630	
040		076760			
050	026060	078060			
058		079360			
070		080660		106970	110610
090		081960		107160	
110					

SUPERNET™ SR

head only with Spring upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
020			
030	023455	075451	119103
035		075421	119705
040	024755	076755	120303
050	026055	078055	120910
058	027355	079355	121510
070	028655	080655	
090	029955	081970	122715
110	031260		

SUPERNET™ SR assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN SR STIC STUB XXX 60CM W/STK BC		075850	075425		078450		081050		083650
SPN SR STIC STUB XXX 60CM W/STK PFC			075440						
SPN SR MIC STUB XXX 60CM W/STK BC									
SPN SR MIC STUB XXX 60CM W/STK PFC									
SPN SR BIC STUB XXX 60CM W/STK BC	022550	023850		025150	026450	027750	029050		031650
SPN SR BIC STUB XXX 60CM W/STK PFC				025180				030250	
SPN SR STIC STUB XXX 90CM W/STK BC			075430	077550					
SPN SR STIC STUB XXX 90CM W/STK PFC									
SPN SR MIC STUB XXX 90CM W/STK BC									
SPN SR MIC STUB XXX 90CM W/STK PFC									
SPN SR BIC STUB XXX 90CM W/STK BC	022950	024250		025610					
SPN SR BIC STUB XXX 90CM W/STK PFC									

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN SR STIC STUB XXX 60CM W/OSTK BC				076950	078250		080850		
SPN SR STIC STUB XXX 60CM W/OSTK PFC									
SPN SR MIC STUB XXX 60CM W/OSTK BC					115655				
SPN SR MIC STUB XXX 60CM W/OSTK PFC									
SPN SR BIC STUB XXX 60CM W/OSTK BC	022350	023650	023430			027550	028850		
SPN SR BIC STUB XXX 60CM W/OSTK PFC		023740							
SPN SR STIC STUB XXX 90CM W/OSTK BC				077350		079950			
SPN SR STIC STUB XXX 90CM W/OSTK PFC									
SPN SR MIC STUB XXX 90CM W/OSTK BC			119720						
SPN SR MIC STUB XXX 90CM W/OSTK PFC									
SPN SR BIC STUB XXX 90CM W/OSTK BC					026650		029250		
SPN SR BIC STUB XXX 90CM W/OSTK PFC									

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

SUPERNET™ SRD

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)


MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020	033610	085610	118600	107350	
030	033850	085850	119200	107450	
035	032550	084550	119800	107520	
040	035150	087150	120400	107550	111050
050	036450	088450	121000	107650	111150
058	037750	089750	121600	107750	
070	039050	091050	122200	107850	111350
090	040350	092350	122800	107950	111450
110	041830	093650	123400		

SUPERNET™ SRD

head only with Everspin™ upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
020		085615		106570	
030		085855		107460	
035		087110	119810		
040		087160		107560	
050		088460		107660	
058	037760	089760	121610	107760	
070		091060	122210	107860	
090				107960	
110					

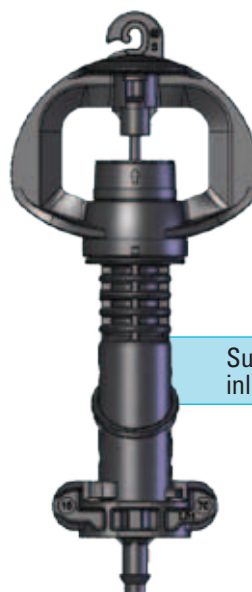

SuperNet™ SRD BIC , barb inlet connector

SUPERNET™ SRD assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN SRD STIC STUB XXX 60CM W/STK BC		086250	035110	087550	088850		091450	092750	
SPN SRD STIC STUB XXX 60CM W/STK PFC									
SPN SRD MIC STUB XXX 60CM W/STK BC	118655	119265	119870	120470	121010	121615	122270	122870	123470
SPN SRD MIC STUB XXX 60CM W/STK PFC									
SPN SRD BIC STUB XXX 60CM W/STK BC	032950	034250	035120	035550	036850	038150	039450	040750	042050
SPN SRD BIC STUB XXX 60CM W/STK PFC				035630			039350		
SPN SRD STIC STUB XXX 90CM W/STK BC			087120	087950			091850		
SPN SRD STIC STUB XXX 90CM W/STK PFC								092900	
SPN SRD MIC STUB XXX 90CM W/STK BC									
SPN SRD MIC STUB XXX 90CM W/STK PFC									
SPN SRD BIC STUB XXX 90CM W/STK BC		034650		035950	037250		039850	041150	042450
SPN SRD BIC STUB XXX 90CM W/STK PFC			035147					042260	

Catalog number : **63500** - (any of below 6 digits)

MODEL	020	030	035	040	050	058	070	090	110
SPN SRD STIC STUB XXX 60CM W/OSTK BC		086050		087350	088650	089950	091250		
SPN SRD STIC STUB XXX 60CM W/OSTK PFC	085620								
SPN SRD MIC STUB XXX 60CM W/OSTK BC	118650	119250	119850	120450	121050	121650	122250	122850	123450
SPN SRD MIC STUB XXX 60CM W/OSTK PFC									
SPN SRD BIC STUB XXX 60CM W/OSTK BC		034050		035350	036650		039250		041850
SPN SRD BIC STUB XXX 60CM W/OSTK PFC		033950							
SPN SRD STIC STUB XXX 90CM W/OSTK BC									
SPN SRD STIC STUB XXX 90CM W/OSTK PFC		086260							
SPN SRD MIC STUB XXX 90CM W/OSTK BC									
SPN SRD MIC STUB XXX 90CM W/OSTK PFC									
SPN SRD BIC STUB XXX 90CM W/OSTK BC				035750					
SPN SRD BIC STUB XXX 90CM W/OSTK PFC									

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



SUPERNET™ SSR

SUPER SHORT RANGE

APPLICATIONS

Designed for permanent application in close proximity to trees.

SPECIFICATIONS

- SSR means a revolving rotor irrigating a small sized area.
- Flow regulated micro-sprinkler, 3 different flow rates: 30, 35, 40 l/h.
Flow rates within pressure range.
- Pressure range 1.5-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
 - Barb
 - Self tapping
 - Press fit
 - 3/8" male threaded
 - 1/2" male threaded
- 2 types of upper bearing:
 - Standard - for normal water
 - Everspin™ - for harsh condition
- The rotor is colored Light Green.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities per tree, uniform distribution and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinkler nozzle.
- Regulated micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for fruit trees, orchards, deciduous and other tree crops requiring efficient water distribution.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
 - Simple, modular parts
 - Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	CONSTANT K	EXPONENT* X	WETTED DIAMETER (M)		SWIVEL (ROTOR) CODE COLOR
							SSR MODEL 20 CM ABOVE GROUND	SSR MODEL 300 CM ABOVE GROUND	
030	30	Brown	1.14	1.5 - 4.0	30	0	2.0	3.0	Light Green
035	35	Light Blue	1.20	1.5 - 4.0	35	0	2.0	3.0	Light Green
040	40	Blue	1.28	1.5 - 4.0	40	0	2.5	3.0	Light Green

*within working pressure range


PACKAGING DATA

SUPERNET™ SSR	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand , 60 cm micro tube length ,w/stake	100	18 x 34 x 79	8.3	20	2000	178
Complete stand , 60 cm micro tube length ,w/o stake	200	18 x 34 x 79	7.5	20	4000	162
Complete stand , 90 cm micro tube length ,w/stake	100	28 x 27 x 113	7.1	16	1600	124
Complete stand , 90 cm micro tube length ,w/o stake	200	28 x 27 x 113	6.7	16	3200	117

SUPERNET™ SSR

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

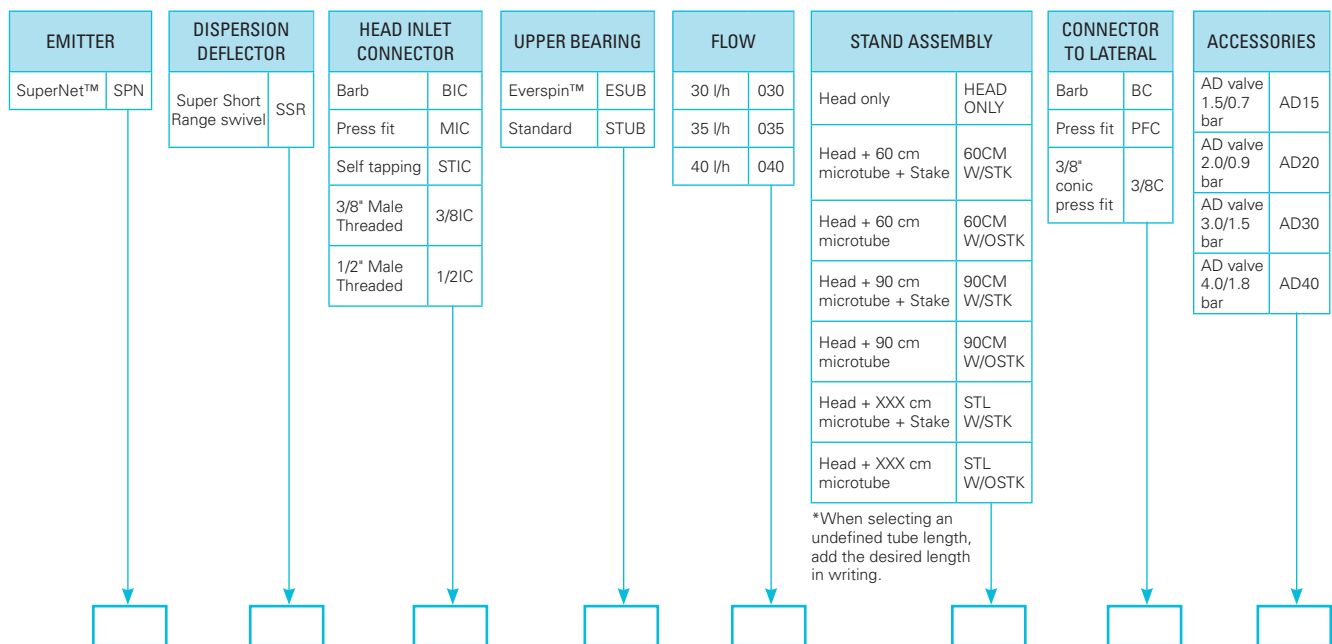

SUPERNET™ SSR

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC
030	157500	151000		
035			156000	106622
040		152000		106752

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel.

Stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



SUPERNET™ UD

UP-SIDE DOWN

APPLICATIONS

For application where sprinklers are mounted inverted to keep the ground clear and prevent damage to the sprinklers by harvesters and machinery.

SPECIFICATIONS

- Special designed up-side down rotor.
- Flow regulated micro-sprinkler, 6 different flow rates: 30, 35, 40, 50, 58, 70, 90 l/h.
Flow rates within pressure range.
- Pressure range 1.5-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
 - Barb
 - Self tapping
 - Press fit
 - 3/8" male threaded
 - 1/2" male threaded
- Upper bearing:
A specially designed spring bearing keeps the anti-ant feature even when the sprinkler is mounted in an up side down position.
- The rotor is colored Green.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities per tree, uniform distribution and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the sprinklers nozzle.
- Regulated micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for fruit trees, orchards, deciduous and other tree crops requiring efficient water distribution.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
 - Simple, modular parts
 - Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	CONSTANT K	EXPONENT* X	WETTED DIAMETER (M) 50 CM ABOVE CROP UD MODEL	SWIVEL (ROTOR) CODE COLOR UD MODEL	WETTED DIAMETER (M) 50 CM ABOVE CROP SR MODEL IN UD POSITION	SWIVEL (ROTOR) CODE COLOR SR MODEL
030	30	Brown	1.14	1.5 - 4.0	30	0	6.0	Green	3.5	Blue
035	35	Light Blue	1.20	1.5 - 4.0	35	0	6.0	Green	4.0	Blue
040	40	Blue	1.28	1.5 - 4.0	40	0	6.5	Green	4.0	Blue
050	50	Green	1.43	1.5 - 4.0	50	0	6.5	Green	4.0	Blue
058	58	Gray	1.55	1.5 - 4.0	58	0	7.0	Green	4.0	Blue
070	70	Black	1.73	1.5 - 4.0	70	0	7.0	Green	4.0	Blue
090	90	Orange	1.74	1.5 - 4.0	90	0	7.0	Green	4.0	Blue

* within working pressure range


PACKAGING DATA

SUPERNET™ UD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand, 30 cm tube length with stabilizer	150	28 x 28 x 57	10.7	32	4800	342
Complete stand, 60 cm tube length with stabilizer	150	18 x 34 x 79	11.8	20	3000	236
Complete stand, 90 cm tube length with stabilizer	150	28 x 27 x 113	12.4	16	2400	198

SUPERNET™ UD

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

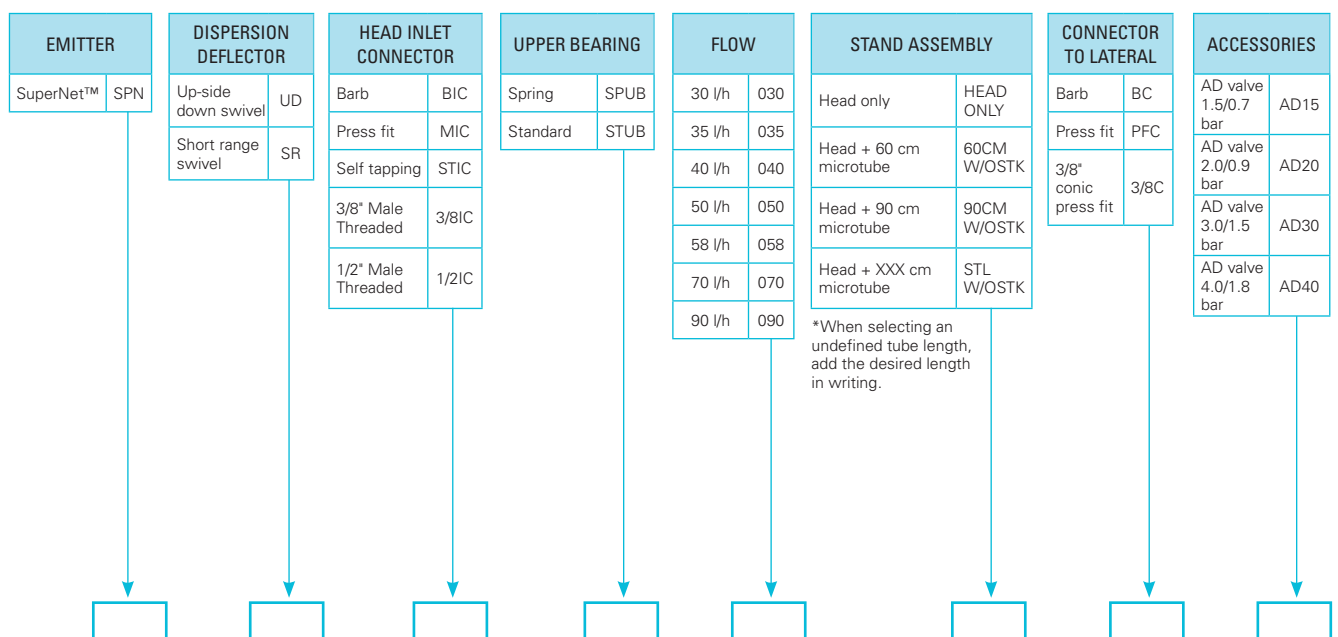

SUPERNET™ UD


head only with Standard upper bearing
Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030			
035	189990		171990
040	190990		
050			
058	192990		174990
070	193990	184990	175990
090			

SUPERNET™ UD

head only with Spring upper bearing
Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030	189000	180000	171000
035	190000	181000	172000
040	191000	182000	173000
050	192000	183000	174000
058	193000	184000	175000
070	194000	185000	176000
090	195000	186000	

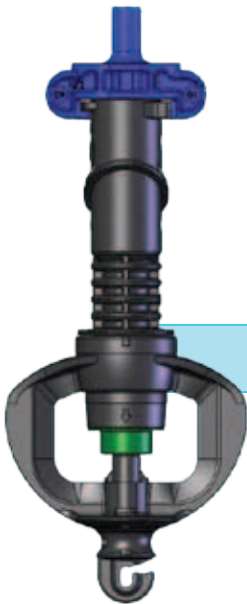

SuperNet™ UD MIC , male press-fit inlet connector

SUPERNET™ UD assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	030	035	040	050	058	070	090
SPN UD STIC SPUB XXX 30CM W/STB BC	180100		182050				
SPN UD STIC SPUB XXX 60CM W/STB BC	180300		182150				
SPN UD STIC SPUB XXX 90CM W/STB BC	180500	181250	182250				
SPN UD BIC SPUB XXX 30CM W/STB BC		190010					
SPN UD BIC SPUB XXX 60CM W/STB BC	189010			192010			
SPN UD BIC SPUB XXX 90CM W/STB BC							
SPN UD MIC SPUB XXX 30CM W/STB BC		172020					
SPN UD MIC SPUB XXX 60CM W/STB BC		172100		174100			
SPN UD MIC SPUB XXX 90CM W/STB BC							

Missing catalog numbers available upon request.
Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.
Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.





SUPERNET™ GS

FULL FIELD OVERLAP



APPLICATIONS

For crops covering the entire field where full-coverage highly uniform irrigation is required.

SPECIFICATIONS

- GS means a revolving rotor designed to provide a wetting pattern that achieves excellent distribution uniformity and full coverage.
- Flow regulated micro-sprinkler, 2 different flow rates: 90,110 l/h.
Flow rates within pressure range.
- Pressure range 2.0-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
 - Barb
 - Self tapping
 - Press fit
 - 3/8" male threaded
 - 1/2" male threaded
- 2 types of upper bearing:
 - Standard - for normal water
 - Everspin™ - for harsh condition
- The rotor is colored Gray.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities, uniform distribution and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinkler nozzle.
- Regulated micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for crops where full-coverage highly uniform irrigation is required.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
 - Simple, modular parts
 - Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	CONSTANT K	EXPONENT*	WETTED DIAMETER (M) GS 100 CM ABOVE GROUND	SWIVEL (ROTOR) CODE COLOR
090	90	Orange	1.74	2.0 - 4.0	90	0	7.5	Light Gray
110	110	Red	1.70	2.0 - 4.0	110	0	8.0	Light Gray

* within working pressure range


PACKAGING DATA

SUPERNET™ GS	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand , 60 cm micro tube length ,w/stake	100	18 x 34 x 79	8.3	20	2000	178
Complete stand , 60 cm micro tube length ,w/o stake	200	18 x 34 x 79	7.5	20	4000	162
Complete stand , 90 cm micro tube length ,w/stake	100	28 x 27 x 113	7.1	16	1600	124
Complete stand , 90 cm micro tube length ,w/o stake	200	28 x 27 x 113	6.7	16	3200	117

SUPERNET™ GS

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

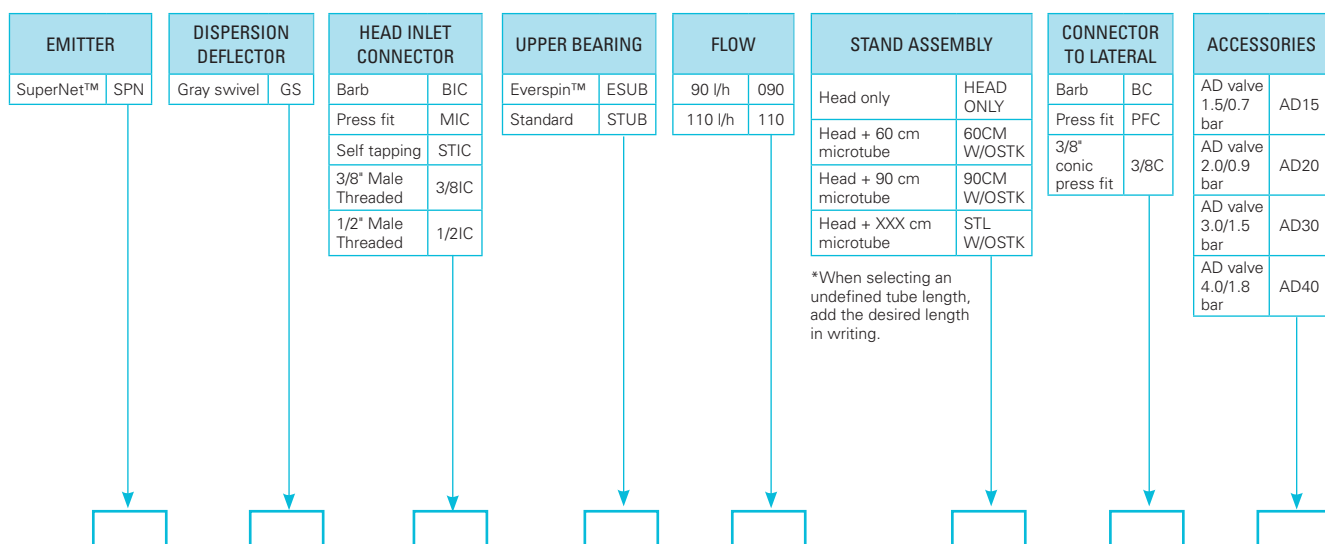

SUPERNET™ GS

head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC	3/8IC	1/2IC
090		095700	136000		166000
110	043900	096000	137000	163000	

SUPERNET™ GS assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	090	110
SPN GS BIC STUB XXX 120CM W/OSTK PFC	043660	043960
SPN GS MIC STUB XXX 120CM W/OSTK PFC		
SPN GS STIC STUB XXX 120CM W/OSTK PFC		



SuperNet™ GS, 1/2" male threaded inlet connector

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel.

All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



SUPERNET™ JET

APPLICATIONS

The SuperNet™ Jet is designed for harsh water containing large amounts of sand thus causing excessive wear of standard rotating swivel.

SPECIFICATIONS

- A static pressure compensated emitter.
- Flow regulated micro-emitter, 7 different flow rates: 30, 35, 40, 50, 58, 70, 90 l/h.
Flow rates within pressure range.
- Pressure range 1.5-4.0 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 5 types of inlet connectors:
Barb
Self tapping
Press fit
3/8" male threaded
1/2" male threaded
- Upper bearing:
Special type of upper bearing (square hole) holds the rotor from spinning.
- 5 types of static deflectors:
360 degrees (12 jets)
330 degrees (10 Jets)
2x90 (butterfly) (8 jets)
180 degrees (6 jets)
90 degrees (4 jets)
- All 5 deflectors are colored Orange.
- SuperNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Unique regulation mechanism ensures even water and nutrients quantities per tree, and wetting diameter regardless of sprinkler's inlet pressures (within pressure range).
- Anti-ant mechanism prevents insect penetration into the area of the micro-emitter nozzle.
- Regulated emitter made of plastic materials resistant to all agrochemicals & weather conditions.
- Water passage area 30% larger than in any other emitter with identical flow rate. The largest water passages on the market – resists clogging.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Long-term reliable service:
Simple, modular parts
Clog-resistant design

SUPERNET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	WORKING PRESSURE RANGE (BAR)	WETTED RADIUS (M)					DEFLECTOR CODE COLOR
					360 DEGREES - 12 JETS 20 CM ABOVE GROUND	300 DEGREES - 10 JETS 20 CM ABOVE GROUND	BUTTERFLY - 2*4 JETS 20 CM ABOVE GROUND	180 DEGREES - 6 JETS 20 CM ABOVE GROUND	90 DEGREES - 4 JETS 20 CM ABOVE GROUND	
030	30	Brown	1.14	1.5 - 4.0	1.9	1.7	1.7	2.8	2.2	Orange
035	35	Light Blue	1.20	1.5 - 4.0	2.3	2.2	2.0	2.8	2.3	Orange
040	40	Blue	1.28	1.5 - 4.0	2.7	2.7	2.2	2.8	2.4	Orange
050	50	Green	1.43	1.5 - 4.0	2.8	2.7	2.2	2.8	2.6	Orange
058	58	Gray	1.55	1.5 - 4.0	2.8	2.9	2.5	3.1	2.9	Orange
070	70	Black	1.73	1.5 - 4.0	2.9	2.9	2.5	3.1	2.9	Orange
090	90	Orange	1.74	1.5 - 4.0	2.9	2.9	2.5	3.1	2.9	Orange

* within working pressure range


PACKAGING DATA

SUPERNET™ JET	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	28 x 28 x 57	10.1	32	16000	335
Complete stand , 60 cm micro tube length ,w/stake	100	18 x 34 x 79	8.3	20	2000	178
Complete stand , 60 cm micro tube length ,w/o stake	200	18 x 34 x 79	7.5	20	4000	162
Complete stand , 90 cm micro tube length ,w/stake	100	28 x 27 x 113	7.1	16	1600	124
Complete stand , 90 cm micro tube length ,w/o stake	200	28 x 27 x 113	6.7	16	3200	117

SUPERNET™ JET

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

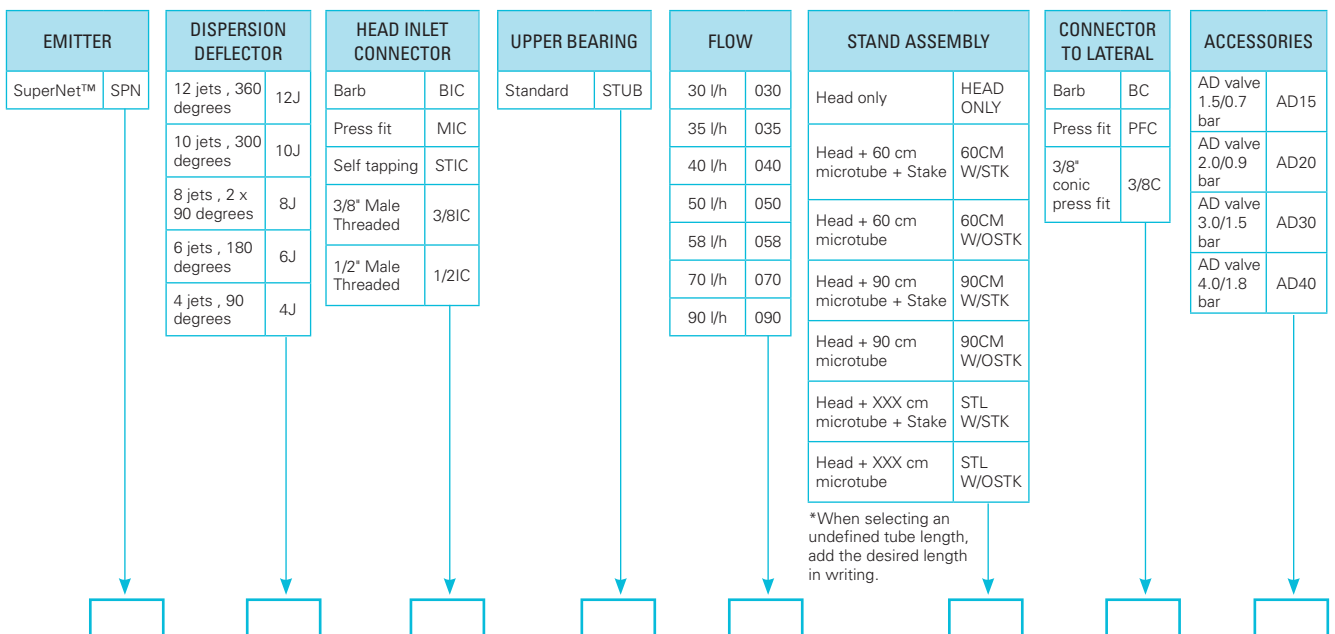

SUPERNET™ JET

12 Jet , head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030		096250	
035	044710	096910	125200
040	045550	097550	125800
050		098850	126400
058		100150	
070	049450	101450	127600
090	050750	102750	

SUPERNET™ JET

10 Jet , head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030			
035	044715		125610
040		097555	
050			126410
058			
070	049455		
090			

SUPERNET™ JET

8 (2*90) Jet , head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030	044260	096260	124620
035		096920	
040	045560	097560	
050			126420
058			
070	049460		
090			

SUPERNET™ JET

6 Jet , head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030		096270	
035	044730	096930	125650
040	045570	097570	125850
050	046870		126430
058	048170	100170	
070	049470	101470	127640
090	050770	102770	

SUPERNET™ JET

4 Jet , head only with Standard upper bearing

Catalog number : **63500** - (any of below 6 digits)

MODEL	BIC	STIC	MIC
030		096265	124640
035	044725		
040	045565	097565	125840
050	046865	098875	126425
058			
070	049465	101465	127630
090		102765	

Missing catalog numbers available upon request



SuperNet™ BIC, barb inlet connector



SuperNet™ STIC, self tapping inlet connector



SuperNet™ MIC, male press-fit inlet connector

SUPERNET™ JET assembly stands

Catalog number : **63500** - (any of below 6 digits)

MODEL	030	035	040	050	058	070	090
SPNJET 12J BIC XXX 60CM W/STK BC			045950				051150
SPNJET 12J STIC XXX 60CM W/STK BC			097950	099250			
SPNJET 12J MIC XXX 60CM W/STK BC							
SPNJET 12J BIC XXX 60CM W/STK PFC							
SPNJET 12J STIC XXX 60CM W/STK PFC							
SPNJET 12J MIC XXX 60CM W/STK PFC							
SPNJET 10J BIC XXX 60CM W/STK BC							
SPNJET 10J STIC XXX 60CM W/STK BC							104010
SPNJET 10J MIC XXX 60CM W/STK BC							
SPNJET 10J BIC XXX 60CM W/STK PFC							
SPNJET 10J STIC XXX 60CM W/STK PFC							
SPNJET 10J MIC XXX 60CM W/STK PFC							
SPNJET 8J BIC XXX 60CM W/STK BC	044267						
SPNJET 8J STIC XXX 60CM W/STK BC							
SPNJET 8J MIC XXX 60CM W/STK BC							
SPNJET 8J BIC XXX 60CM W/STK PFC							
SPNJET 8J STIC XXX 60CM W/STK PFC							
SPNJET 8J MIC XXX 60CM W/STK PFC							
SPNJET 6J BIC XXX 60CM W/STK BC				046890			
SPNJET 6J STIC XXX 60CM W/STK BC							
SPNJET 6J MIC XXX 60CM W/STK BC							
SPNJET 6J BIC XXX 60CM W/STK PFC							
SPNJET 6J STIC XXX 60CM W/STK PFC			097590				
SPNJET 6J MIC XXX 60CM W/STK PFC	124635						
SPNJET 4J BIC XXX 60CM W/STK BC							
SPNJET 4J STIC XXX 60CM W/STK BC							
SPNJET 4J MIC XXX 60CM W/STK BC							
SPNJET 4J BIC XXX 60CM W/STK PFC							
SPNJET 4J STIC XXX 60CM W/STK PFC			097567				
SPNJET 4J MIC XXX 60CM W/STK PFC							

Catalog number : **63500** - (any of below 6 digits)

MODEL	030	035	040	050	058	070	090
SPNJET 12J BIC XXX 60CM W/OSTK BC	044273		045750				
SPNJET 12J STIC XXX 60CM W/OSTK BC			097750				
SPNJET 12J MIC XXX 60CM W/OSTK BC				126500			
SPNJET 12J BIC XXX 60CM W/OSTK PFC							
SPNJET 12J STIC XXX 60CM W/OSTK PFC	096300	097000	097700	099000	100250	101550	102850
SPNJET 12J MIC XXX 60CM W/OSTK PFC							
SPNJET 10J BIC XXX 60CM W/OSTK BC							
SPNJET 10J STIC XXX 60CM W/OSTK BC	096350						
SPNJET 10J MIC XXX 60CM W/OSTK BC							
SPNJET 10J BIC XXX 60CM W/OSTK PFC							
SPNJET 10J STIC XXX 60CM W/OSTK PFC							
SPNJET 10J MIC XXX 60CM W/OSTK PFC							
SPNJET 6J BIC XXX 60CM W/OSTK BC			045573				
SPNJET 6J STIC XXX 60CM W/OSTK BC							
SPNJET 6J MIC XXX 60CM W/OSTK BC							
SPNJET 6J BIC XXX 60CM W/OSTK PFC							
SPNJET 6J STIC XXX 60CM W/OSTK PFC							
SPNJET 6J MIC XXX 60CM W/OSTK PFC							

Missing catalog numbers available upon request.

Background color defines the code color of the respective deflector. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

SUPERNET™ COMPONENTS

STANDARD UPPER BEARING CIRCULAR HOLE - TO BE USED ON ALL SUPERNET™ MICRO- SPRINKLERS		STANDARD UPPER BEARING SQUARE HOLE - TO BE USED ON ALL SUPERNET™ MICRO-JETS (GRAY)		EVERSPIN™ UPPER BEARING CIRCULAR HOLE - TO BE USED ON ALL SUPERNET™ MICRO- SPRINKLERS IN HARSH WATER CONDITIONS		SPRING UPPER BEARING CIRCULAR HOLE - TO BE USED ON UD SUPERNET™ MICRO- SPRINKLERS	
1 unit 63520-005450		1 unit 63520-005400		1 unit 63520-011400		1 unit 63520-011500	
100 units/bag 63520-005470		100 units/bag 63520-005420		100 units/bag 63520-011425		100 units/bag 63520-011530	

FRAME		STREAM SPLITTER	
1 unit 63520-005500		1 unit 63520-005800	
10 units/bag 63520-005525		10 units/bag	
100 units/bag 63520-005510		100 units/bag 63520-005830	

LR SWIVEL (PURPLE) TO BE USED WITH 20, 30, 35 AND 40 L/H		LR SWIVEL (BLACK) TO BE USED WITH 50, 58, 70, 90 AND 110L/H		SR SWIVEL (BLUE) TO BE USED WITH ALL FLOWS	
1 unit 63520-005100		1 unit 63520-005000		1 unit 63520-005200	
10 units/bag 63520-005102		10 units/bag 63520-005005		10 units/bag 63520-005205	
100 units/bag 63520-005115		100 units/bag 63520-005010		100 units/bag 63520-005220	

LRD SWIVEL (PURPLE) TO BE USED WITH 20, 30, 35 AND 40 L/H		LRD SWIVEL (BLACK) TO BE USED WITH 50, 58, 70, 90 AND 110L/H		SRD SWIVEL (BLUE) TO BE USED WITH ALL FLOWS	
1 unit 63520-005160		1 unit 63520-005150		1 unit 63520-005300	
10 units/bag 63520-005165		10 units/bag		10 units/bag	
100 units/bag 63520-005170		100 units/bag 63520-005155		100 units/bag 63520-005310	

UD SWIVEL (GREEN) W/SLEEVE TO BE USED WITH 30, 35, 40, 50, 58 AND 70 L/H		LR SWIVEL (GRAY) TO BE USED WITH GS MODEL 90 AND 110 L/H		SSR SWIVEL (LIGHT GREEN) TO BE USED WITH 30, 35 AND 40 L/H	
1 unit 63520-005180		1 unit 63520-005120		1 unit 63520-005320	
10 units/bag 63520-005185		10 units/bag 63520-005122		10 units/bag	
100 units/bag 63520-005188		100 units/bag 63520-005125		100 units/bag 63520-005340	

STATIC DEFLECTORS TO BE USED WITH 30, 35, 40, 50, 58, 70 AND 90 L/H			
	1 unit	100 units/bag	
	12 jets (360 degrees)	63520-005350	63520-005355
	10 jets (300 degrees)	63520-005360	63520-005365
	8 jets (2*90 degrees)	63520-005370	63520-005375
	6 jets (180 degrees)	63520-005380	63520-005385
	4 jets (90 degrees)	63520-005390	63520-005397

Missing catalog numbers available upon request

SUPERNET™ COMPONENTS


NOZZLE TUBE	
20 l/h	63520-001000
30 l/h	63520-001100
35 l/h	63520-001150
40 l/h	63520-001200
50 l/h	63520-001300
58 l/h	63520-001400
70 l/h	63520-001500
90 l/h	63520-001600
110 l/h	63520-001700




DIAPHRAGM	
1 unit	63520-005600
100 units/bag	63520-005605




FLOW CONTROL CHAMBER WITH BARB INLET CONNECTOR		
20 l/h	63520-001800	Purple
30 l/h	63520-002200	Brown
35 l/h	63520-002510	Light Blue
40 l/h	63520-002600	Blue
50 l/h	63520-003000	Green
58 l/h	63520-003400	Gray
70 l/h	63520-003800	Black
90 l/h	63520-004200	Orange
110 l/h	63520-004600	Red




FLOW CONTROL CHAMBER WITH BARB INLET CONNECTOR + ASSEMBLY "O" RING		
20 l/h	63520-004912	Purple
30 l/h	63520-004925	Brown
35 l/h		
40 l/h		
50 l/h	63520-004952	Green
58 l/h		
70 l/h		
90 l/h		
110 l/h		




FLOW CONTROL CHAMBER WITH SELF TAPPING INLET CONNECTOR		
20 l/h	63520-001900	Purple
30 l/h	63520-002300	Brown
35 l/h	63520-002520	Light Blue
40 l/h	63520-002700	Blue
50 l/h	63520-003100	Green
58 l/h	63520-003500	Gray
70 l/h	63520-003900	Black
90 l/h	63520-004300	Orange
110 l/h	63520-004700	Red



FLOW CONTROL CHAMBER WITH SELF TAPPING INLET CONNECTOR + ASSEMBLY "O" RING		
20 l/h	63520-004910	Purple
30 l/h	63520-004920	Brown
35 l/h	63520-004930	Light Blue
40 l/h	63520-004940	Blue
50 l/h	63520-004950	Green
58 l/h	63520-004960	Gray
70 l/h	63520-004970	Black
90 l/h	63520-004980	Orange
110 l/h	63520-004990	Red




FLOW CONTROL CHAMBER WITH MALE PRESS-FIT INLET CONNECTOR		
20 l/h	63520-001750	Purple
30 l/h	63520-002150	Brown
35 l/h	63520-002505	Light Blue
40 l/h	63520-002570	Blue
50 l/h	63520-002950	Green
58 l/h	63520-003350	Gray
70 l/h	63520-003750	Black
90 l/h	63520-004150	Orange
110 l/h	63520-004550	Red



FLOW CONTROL CHAMBER WITH 3/8" MALE THREADED INLET CONNECTOR		
20 l/h	63520-002000	Purple
30 l/h	63520-002400	Brown
35 l/h	63520-002530	Light Blue
40 l/h	63520-002800	Blue
50 l/h	63520-003200	Green
58 l/h	63520-003600	Gray
70 l/h	63520-004000	Black
90 l/h	63520-004400	Orange
110 l/h	63520-004800	Red



FLOW CONTROL CHAMBER WITH 1/2" MALE THREADED INLET CONNECTOR		
20 l/h	63520-002100	Purple
30 l/h	63520-002500	Brown
35 l/h	63520-002550	Light Blue
40 l/h	63520-002900	Blue
50 l/h	63520-003300	Green
58 l/h	63520-003700	Gray
70 l/h	63520-004100	Black
90 l/h	63520-004500	Orange
110 l/h	63520-004900	Red



Missing catalog numbers available upon request



STRIPNET™ PRO

PRESSURE-COMPENSATED, STRIP FROST-FIGHTING EMITTER

APPLICATIONS

- Strip frost-fighting on vineyards.
- Cooling of trellised crops

SPECIFICATIONS

- Pressure compensated static emitter.
- Pressure regulating range: 2.0-4.0 bar.
- Rectangular water covering pattern: 0.5 meters wide by 5.5 meters long.
- Inlet connectors: barb.
- Recommended filtration: 130 micron / 120 mesh.

Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water.

Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter.

When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.

- Maximum recommended distance between heads: 5.0 meters.
- One active, brown colored nozzle; one plugged, black colored nozzle.
- Can be mounted on wood or metal stakes or between two of the existing wires on the growing line.
- No moving parts.
- Acid resistant (AA) raw materials.

FEATURES AND BENEFITS

- Unique regulation mechanism makes it the perfect choice for hillside applications or longer rows.
- The StripNet™ Pro frost-fighting system operates using as little as 20 m³/hectare (depending on vine row spacing) - less than half the water required by full-coverage sprinkler systems.
- Alignment problems are solved with the unique, grower-friendly mounting bracket between wires system; simply install it and then forget about it. Proper alignment is inherent.
- Micro-emitter made of plastic materials is resistant to all agrochemicals and weather conditions.
- Energy and water saving.
- Simple, modular parts.

STRIPNET™ PRO TECHNICAL DATA


MODEL	FLOW RATE* (l/h)	CODE COLOR	NOZZLE WATER PASSAGES AREA (MM²)	WORKING PRESSURE RANGE (BAR)	WETTED AREA (M X M)	ACTIVE NOZZLE CODE COLOR
30	31	Brown	0.83	2.0-4.0	0.5 x 5.5	Brown

*Within working pressure range

PACKAGING DATA

STRIPNET™ PRO	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	650	18 x 34 x 79	12.2	36	23400	439
Complete stand (120 cm) w/o stake	100	17 x 26 x 139	10.1	15	1500	152
Complete stand (200 cm) w/o stake	50	17 x 26 x 139	7.2	15	750	108

STRIPNET™ PRO HEAD ONLY

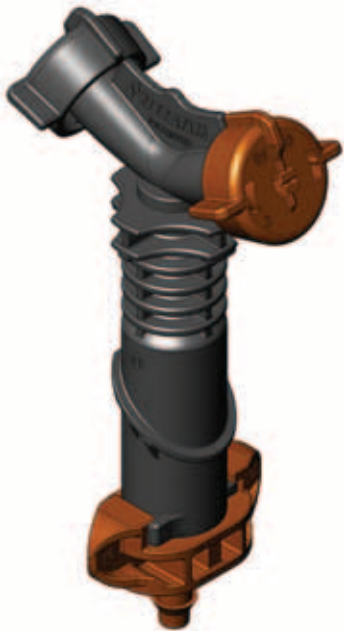MODEL	BIC
030	
64400-001000	

STRIPNET™ PRO COMPONENTS

STRIPNET™ PRO ACTIVE NOZZLE (BROWN)	
64420-002680	
STRIPNET™ PRO PLUGGED NOZZLE (BLACK)	
64420-002641	
STRIPNET™ PRO "Y" NOZZLES BODY	
64420-002700	
STRIPNET™ PRO TUBE	
64420-002600	

STRIPNET™ PRO ASSEMBLY STANDS


Catalog number : **64400** - (any of below 6 digits)

MODEL	030
STRIPNET PRO BIC 030 120CM W/OSTK	001150
STRIPNET PRO BIC 030 200CM W/OSTK	001480

All assembly stands include 4*6.5 mm black SPE micro-tube.
Other stand combinations can be ordered.

ASSEMBLY OPTIONS

STRIPNET™ PRO CAN BE ASSEMBLED IN ONE OF THE FOLLOWING THREE WAYS:

On a wooden pole, with a Netafim™ clamp, Catalog number, 1 unit: 64420-003100 600 units p/box, 28 x 27 x 57 cm, 5.8 kg	
On a metal stake (2.5 to 5.0 mm thick), with a Netafim™ special design clamp, Catalog number, 1 unit: 64420-003010 1200 units p/box, 35 x 35 x 57 cm, 14.5 kg	

When the distances between stakes are more than five meters, or when exact alignment is preferred, it is recommended to use the Netafim™ "bracket between wires", unique installation system between two of the vineyard metal wires. This product includes two injected plastic parts, a metal or fiberglass rod (according to the user's choice), and two metal wires for tightening.

2 plastic parts Catalog number: 64420-003600 200 units p/box (only the 2 plastic parts), 18 x 34 x 79 cm, 6.3 kg Double loop wires ties (2 units) Catalog number: 64420-003700 Metal rod, 6 mm diameter 60 cm length Catalog number: 65080-001000 100 cm length Catalog number: 65080-001100	
---	--

*Other metal rod lengths available upon request





PULSAR™

PRESSURE COMPENSATED PULSATOR

DISTRIBUTES RELATIVELY SMALL WATER AMOUNTS OVER A LARGE WETTED AREA.

APPLICATIONS

- Frost mitigation in vineyards.
- Frost mitigation in fruit trees.
- Cooling in vineyards, fruit trees and open field crops.
- Long shift irrigation.

SPECIFICATIONS

- Pressure-compensation range: 2.5 - 4.0 bar at the micro-emitter head.
- Recommended filtration: 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles contained in the water.
Wherever sand contained in the water exceed 2 ppm, Hydro-cyclone filter is to be installed before the main filter.
When sand/ silt/ clay exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Consists of a flow regulator (Pressure Compensated dripper), a micro tube connecting between the regulator and the pulsator chamber inlet, pulsator tubing with an air bag inside, AD valve and micro-emitter head according to the specific application designed for the product.
- UV resistant.
- Chemical resistant to standard nutrients used in agriculture.
- Several techniques/ adapters/ fittings offered for installation in the field.

FEATURES AND BENEFITS

- Pressure compensated: Precise and equal amounts of water are delivered over a broad pressure range. 100% uniformity of water distribution along the laterals.
- Several pulses per minute, according to the selected flow rate, ensure continuous irrigation over a large area for many hours.
- Soil saturation / flooding are avoided even after many hours of irrigation.
- The water supply system including pump, filtration system, pipes and fittings is relatively small and far less expensive to purchase, install and maintain.

APPLICATION-REQUIRED HEAD	STRIPNET™	GYRONET™ SSR	MISTNET™	GYRONET™ SR
Frost mitigation in vineyards	X			
Frost mitigation in fruit trees		X		
Cooling and/or humidification		X	X	X
Long shift irrigation		X		X

PULSAR™ UR WITH STRIPNET™ HEAD

APPLICATIONS

- Strip frost-mitigation in vineyards.
- Cooling of trellised crops.

DESCRIPTION AND CATALOG NUMBER SAMPLE

CATALOG NUMBER: 63700-005000
SAP DESCRIPTION: PLSR URB 012 STR31 ADBLUP 120CM W/O ADP
PRODUCT COMPONENTS: Pulsar™, Flow regulator 12 l/h, 120 cm micro-tube, tube with barb inlet connector, AD valve with Blue pin, StripNet™ head with one active nozzle.



PULSAR™ UR WITH GYRONET™ HEAD

APPLICATIONS

- Frost mitigation in fruit trees.
- Cooling of fruit trees and other crops.

DESCRIPTION AND CATALOG NUMBER SAMPLE

CATALOG NUMBER: 63700-008200
SAP DESCRIPTION: : PLSR URB 020 GYR9SSR ADBCKP 200CMW/OADP
PRODUCT COMPONENTS: Pulsar™, Flow regulator 20 l/h, 200 cm micro-tube, tube with barb inlet connector, AD valve with black pin, GyroNet™ SSR orange nozzle.



PULSAR™ UR WITH MISTNET™ HEAD

APPLICATIONS

Cooling and humidification of the trees area.

DESCRIPTION AND CATALOG NUMBER SAMPLE

CATALOG NUMBER: 63700-006000
SAP DESCRIPTION: : PLSR URB 008 MST25 ADBCKP 120CM W/O ADP
PRODUCT COMPONENTS: Pulsar™, Flow regulator 8 l/h, 120 cm micro-tube, tube with barb inlet connector, AD valve with black pin, MistNet™ brown nozzle.



PULSAR™ UR WITH GYRONET™ HEAD

APPLICATIONS

Irrigation of fruit trees and other crops.

DESCRIPTION AND CATALOG NUMBER SAMPLE

CATALOG NUMBER: 63700-007100
SAP DESCRIPTION: PLSR URB 008 GYR9SR ADBCKP 60CM W/O ADP
PRODUCT COMPONENTS: Pulsar™, Flow regulator 8 l/h, 60 cm micro-tube, tube with barb inlet connector, AD valve with black pin, GyroNet™ SR orange nozzle.



PULSAR™ UD WITH GYRONET™ HEAD

APPLICATIONS

Long shift irrigation of fruit trees, of nurseries, and other open field crops.

DESCRIPTION AND CATALOG NUMBER SAMPLE

CATALOG NUMBER: 63700-010500
SAP DESCRIPTION: PLSR UDB 012 GYR9SR ADBCKP 60CM GRAY
PRODUCT COMPONENTS: Pulsar™ UD, Flow regulator 12 l/h, 60 cm micro-tube, tube with barb inlet connector, AD valve with black pin, GyroNet™ SR orange nozzle.



ASSEMBLY OPTIONS

Pulsar™ UR can be assembled in one of the following ways:

CLAMP FOR WOOD POLES		CLAMP FOR METAL STAKES		ADAPTER TO METAL/ FIBERGLASS RODS	
64420-003100		64420-003010		6 mm rod (Blue) 63520-005950	
				8 mm rod (Black) 63520-005970	

For correct installation of the Pulsar™ UR it is recommended to use special UV protected bands for this purpose: Black band 380*4.8 UV (100/bag) .
Catalog number: 63720-001800 (100 units /bag)



SPARE PARTS FOR THE PULSAR™ PRODUCTS

DESCRIPTION	CATALOG NUMBER	PICTURE
PLSR AD BLACK PIN	63700-001000	
PLSR AD BLUE PIN	63700-001020	
PLSR TUBE BARB ASSY FOR UR	63700-001400	
PLSR TUBE BARB ASSY FOR UD	63700-001300	
PLSR AIR BAG	63720-002000	

PACKAGING DATA

PULSAR™	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only (UR tube+AD valve+StripNet)	80	28 x 28 x 57	8.6	32	2560	275
Head only (UR tube+AD valve+GyroNet)	80	28 x 28 x 57	9.1	32	2560	291
Head only (UR tube+AD valve+MistNet)	80	28 x 28 x 57	8.6	32	2560	275
Head only (UD tube+AD valve+GyroNet)	80	28 x 28 x 57	9.1	32	2560	291
Complete UR stand (120 cm) w/o stake	50	28 x 27 x 113	8.8	16	800	141
Complete UR stand (200 cm) w/o stake	50	28 x 27 x 113	9.2	16	800	147
Complete UD stand (30 cm) w/o stake	100	28 x 27 x 113	15.2	16	1600	243



GYRONET™ LR & LRD

LONG RANGE & LONG RANGE WITH DEFLECTOR

APPLICATIONS

Irrigation of tree plantations with large root volumes.

SPECIFICATIONS

- LR means a revolving rotor irrigating a large area.
- LRD stream deflector concentrates all the water in the area surrounding the young tree during the initial growing period. When the tree grows, the stream deflector can be broken off, thus enabling extended irrigation diameter.
- Micro-sprinkler, 10 different flow rates: 27, 40, 58, 70, 90, 120, 150, 200, 250, 300 l/h.
Nominal flow rates at 1.7 bar pressure.
- Maximum recommended working pressure: 2.5 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 3 types of inlet connectors:
Self tapping
Press fit
3/8" male threaded
- 2 types of upper bearing:
Standard - for normal water
Everspin™ - for harsh conditions
- The rotor is colored Purple for flows 27 and 40 l/h, Black for flows of 50 to 120 l/h and Gray for flows of 150 to 300 l/h.

FEATURES AND BENEFITS

- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinklers nozzle.
- Micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
Simple, modular parts

GYRONET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED DIAMETER (M)		SWIVEL (ROTOR) CODE COLOR
		(MM)				LR 20 CM ABOVE GROUND	LRD 20 CM ABOVE GROUND	
027	Brown	0.75	6.7	0.5	2.5	4.0	1.5	Purple
040	Blue	0.90	9.4	0.5	2.5	5.5	1.5	Purple
058	Gray	1.10	13.5	0.5	2.5	7.0	1.5	Black
070	Black	1.20	17.4	0.5	2.5	7.0	2.0	Black
090	Orange	1.40	22.4	0.5	2.5	7.0	2.0	Black
120	Red	1.57	28.8	0.5	2.5	8.0	2.0	Black
150	Sky Blue	1.77	37.5	0.5	2.5	8.5	N/A	Gray
200	Yellow	2.04	49.1	0.5	2.5	9.5	N/A	Gray
250	Purple	2.28	61.9	0.5	2.5	10.0	N/A	Gray
300	Green	2.48	73.2	0.5	2.5	11.0	N/A	Gray


PACKAGING DATA

GYRONET™ LR & LRD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	1000	28 x 28 x 57	12.5	32	32000	412
Complete stand (60 cm) w/stake	100	18 x 34 x 79	6.3	20	2000	137
Complete stand (60 cm) w/o stake	250	18 x 34 x 79	7.1	20	5000	153
Complete stand (90 cm) w/stake	150	28 x 27 x 113	7.6	18	2700	147
Complete stand (90 cm) w/o stake	200	28 x 27 x 113	8.1	18	3600	155

GYRONET™ LONG RANGE & LONG RANGE WITH DEFLECTOR

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

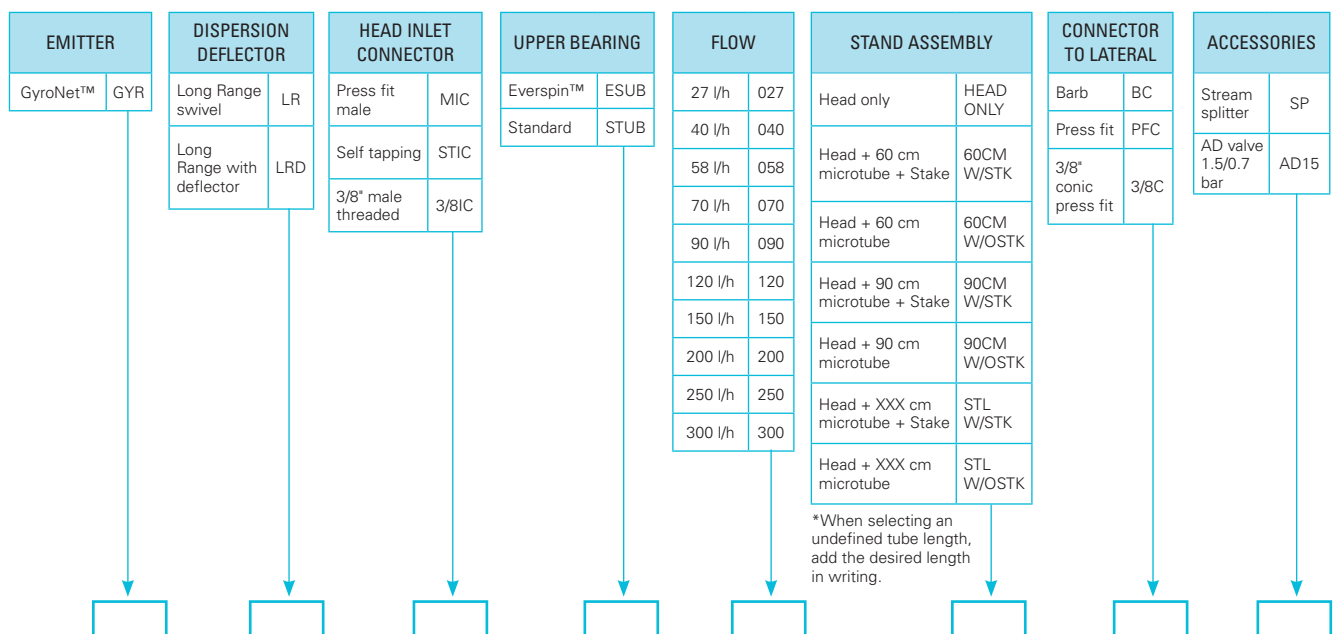


GYRONET™ LR

head only with Standard upper bearing

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC	3/8IC
027	000800	020200	N/A
040	001000	020300	N/A
058	002260	021560	N/A
070	002300	021600	078400
090	003555	022855	
120	003600	022900	
150	012505	070000	
200	N/A	071500	079200
250	N/A	073000	
300	N/A	074500	



GyroNet™ LR STIC, self tapping inlet connector



GyroNet™ LR MIC, press fit, male inlet connector



GyroNet™ LR 3/8" male threaded inlet connector

GYRONET™ LR

head only with Everspin™ upper bearing

Catalog number : **64000** - (any of below 6 digits)

Model	STIC	MIC	3/8IC
027	000805		N/A
040	001010		N/A
058	002262		N/A
070	002305		078420
090	003557		
120	003610	022945	078820
150	012507	070010	
200	N/A	071100	
250	N/A	071250	
300	N/A	071400	

GYRONET™ LR assembly stands

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR LR STIC STUB XXX 60CM W/STK BC	000880	001400		002700	003575	004000		N/A	N/A	N/A
GYR LR STIC STUB XXX 60CM W/STK PFC		001300	002290	002600				N/A	N/A	N/A
GYR LR MIC STUB XXX 60CM W/STK BC		020700		022000		023300				
GYR LR MIC STUB XXX 60CM W/STK PFC				021900						
GYR LR STIC STUB XXX 90CM W/STK BC			002296	003100				N/A	N/A	N/A
GYR LR STIC STUB XXX 90CM W/STK PFC		001700						N/A	N/A	N/A
GYR LR MIC STUB XXX 90CM W/STK BC		021100								
GYR LR MIC STUB XXX 90CM W/STK PFC		021000		022300	022854	023600				

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR LR STIC STUB XXX 60CM W/OSTK BC		001200		002500	003570			N/A	N/A	N/A
GYR LR STIC STUB XXX 60CM W/OSTK PFC	000850	001100	002280	002400	003578	003700	004853	N/A	N/A	N/A
GYR LR MIC STUB XXX 60CM W/OSTK BC										
GYR LR MIC STUB XXX 60CM W/OSTK PFC										
GYR LR STIC STUB XXX 90CM W/OSTK BC						004200		N/A	N/A	N/A
GYR LR STIC STUB XXX 90CM W/OSTK PFC								N/A	N/A	N/A
GYR LR MIC STUB XXX 90CM W/OSTK BC				022200						
GYR LR MIC STUB XXX 90CM W/OSTK PFC				022100						

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

GYRONET™ LRD

head only with Standard upper bearing

Catalog number : **64000** - (any of below 6 digits)


MODEL	STIC	MIC	3/8IC
027	004860	024175	N/A
040	004900	024200	N/A
058	006110	025410	N/A
070	006150	025450	079400
090	007355	026655	079600
120	007400	026700	079800
150	008605		080000
200	N/A		080200
250	N/A		079850
300	N/A		079860

GYRONET™ LRD

head only with Everspin™ upper bearing

Catalog number : **64000** - (any of below 6 digits)

Model	STIC	MIC	3/8IC
027	004865	024176	N/A
040	004910	024210	N/A
058	006112	025411	N/A
070	006155	025460	079420
090	007357	026656	079620
120	007410	026710	079820
150			080020
200	N/A		080220
250	N/A		
300	N/A		



GyroNet™ LRD STIC, self tapping inlet connector



GyroNet™ LRD MIC, press fit, male inlet connector



GyroNet™ LRD 3/8" male threaded inlet connector

GYRONET™ LRD assembly stands

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR LRD STIC STUB XXX 60CM W/STK BC								N/A	N/A	N/A
GYR LRD STIC STUB XXX 60CM W/STK PFC								N/A	N/A	N/A
GYR LRD MIC STUB XXX 60CM W/STK BC	024180	024600	025415	025850	026657	027100				
GYR LRD MIC STUB XXX 60CM W/STK PFC										
GYR LRD STIC STUB XXX 90CM W/STK BC								N/A	N/A	N/A
GYR LRD STIC STUB XXX 90CM W/STK PFC								N/A	N/A	N/A
GYR LRD MIC STUB XXX 90CM W/STK BC					026685					
GYR LRD MIC STUB XXX 90CM W/STK PFC		024900	025430	026150	026690	027400				

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR LRD STIC STUB XXX 60CM W/OSTK BC								N/A	N/A	N/A
GYR LRD STIC STUB XXX 60CM W/OSTK PFC								N/A	N/A	N/A
GYR LRD MIC STUB XXX 60CM W/OSTK BC										
GYR LRD MIC STUB XXX 60CM W/OSTK PFC										
GYR LRD STIC STUB XXX 90CM W/OSTK BC								N/A	N/A	N/A
GYR LRD STIC STUB XXX 90CM W/OSTK PFC								N/A	N/A	N/A
GYR LRD MIC STUB XXX 90CM W/OSTK BC										
GYR LRD MIC STUB XXX 90CM W/OSTK PFC		024700		025950	026660	027200				

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



GYRONET™ SR & SRD

MEDIUM RANGE & MEDIUM RANGE WITH DEFLECTOR

APPLICATIONS

Irrigation of tree plantations, and orchards where ground is shaded by the foliage, leaving dry strips between the rows.

SPECIFICATIONS

- SR means a revolving rotor irrigating a medium sized area.
- SRD stream deflector concentrates all the water in the area surrounding the young tree during the initial growing period. When the tree grows, the stream deflector can be broken off, thus enabling extended irrigation diameter.
- Micro-sprinkler, 10 different flow rates: 27, 40, 58, 70, 90, 120, 150, 200, 250, 300 l/h.
Nominal flow rates at 1.7 bar pressure.
- Maximum recommended working pressure: 2.5 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 3 types of inlet connectors:
Self tapping
Press fit
3/8" male threaded
- 3 types of upper bearing:
Standard - for normal water
Everspin™ - for harsh condition
With spring - for up side down application
- The rotor is colored Blue.

FEATURES AND BENEFITS

- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinklers nozzle.
- Micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
Simple, modular parts

GYRONET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED DIAMETER (M)		SWIVEL (ROTOR) CODE COLOR
						SR 20 CM ABOVE GROUND	SRD 20 CM ABOVE GROUND	
027	Brown	0.75	6.7	0.5	2.5	4.5	1.3	Blue
040	Blue	0.90	9.4	0.5	2.5	4.5	1.3	Blue
058	Gray	1.10	13.5	0.5	2.5	5.0	1.3	Blue
070	Black	1.20	17.4	0.5	2.5	5.5	1.3	Blue
090	Orange	1.40	22.4	0.5	2.5	6.0	1.3	Blue
120	Red	1.57	28.8	0.5	2.5	6.5	1.3	Blue
150	Sky Blue	1.77	37.5	0.5	2.5	7.0	2.5	Blue
200	Yellow	2.04	49.1	0.5	2.5	8.5	2.5	Blue
250	Purple	2.28	61.9	0.5	2.5	8.5	3.5	Blue
300	Green	2.48	73.2	0.5	2.5	8.5	3.5	Blue


PACKAGING DATA

GYRONET™ SR & SRD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	1000	28 x 28 x 57	12.5	32	32000	412
Complete stand (60 cm) w/stake	100	18 x 34 x 79	6.3	20	2000	137
Complete stand (60 cm) w/o stake	250	18 x 34 x 79	7.1	20	5000	153
Complete stand (90 cm) w/stake	150	28 x 27 x 113	7.6	18	2700	147
Complete stand (90 cm) w/o stake	200	28 x 27 x 113	8.1	18	3600	155

GYRONET™ SHORT RANGE & SHORT RANGE WITH DEFLECTOR

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

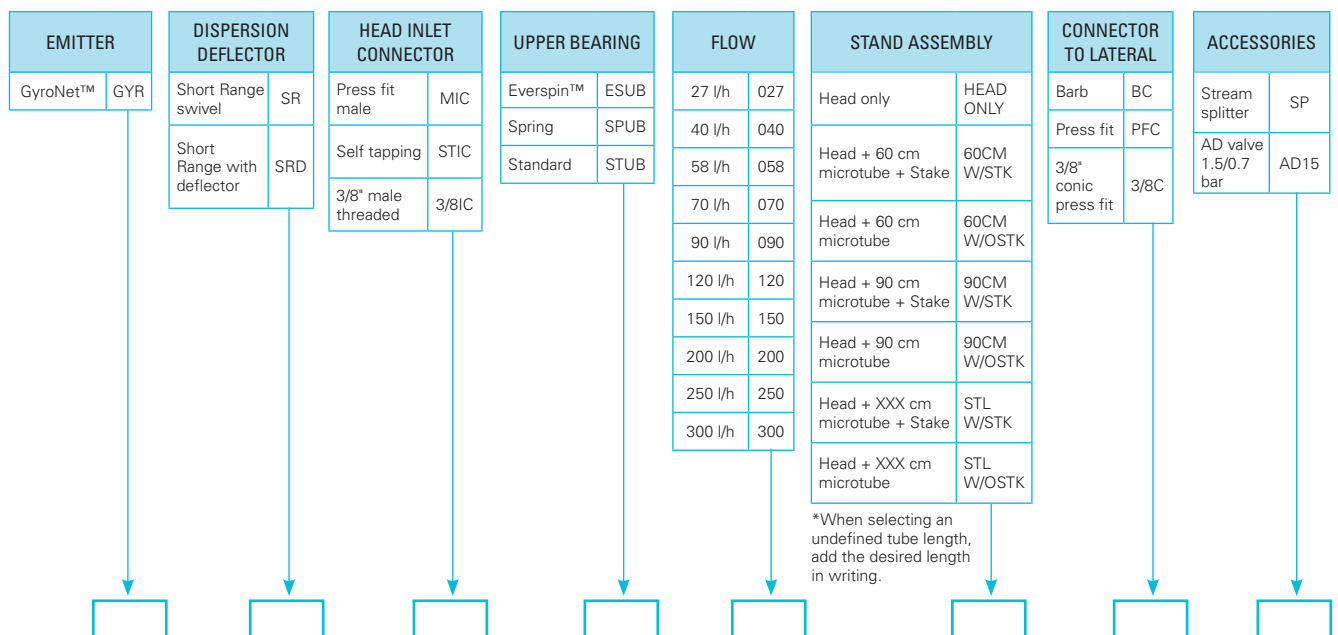

GYRONET™ SR

head only with Standard upper bearing

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC	3/8IC
027	008630	027925	N/A
040	008650	027950	N/A
058	009910	029210	N/A
070	009950	029250	076500
090	011205	030505	
120	011250	030550	
150			077005
200	N/A	071490	
250	N/A		
300	N/A	031110	



GyroNet™ SR STIC, self tapping inlet connector

GyroNet™ SR MIC, press fit, male inlet connector

GYRONET™ SR

head only with Everspin™ upper bearing

Catalog number : **64000** - (any of below 6 digits)

Model	STIC	MIC	3/8IC
027	008632		N/A
040	008652		N/A
058	009912	029215	N/A
070	009952	029255	076520
090	011207	030507	076720
120	011270		
150			
200	N/A		
250	N/A		
300	N/A		

GYRONET™ SR

head only with Spring upper bearing

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC	3/8IC
027		027930	N/A
040	008660	027960	N/A
058		029211	N/A
070		029260	
090		030506	
120	011260	030560	
150			
200	N/A		
250	N/A	038510	
300	N/A		

GYRONET™ SR assembly stands

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR SR STIC STUB XXX 60CM W/STK BC		009050		010350				N/A	N/A	N/A
GYR SR STIC STUB XXX 60CM W/STK PFC	008635			010250		011550		N/A	N/A	N/A
GYR SR MIC STUB XXX 60CM W/STK BC		028350		029650		030950				
GYR SR MIC STUB XXX 60CM W/STK PFC				029550						
GYR SR STIC STUB XXX 90CM W/STK BC						012050		N/A	N/A	N/A
GYR SR STIC STUB XXX 90CM W/STK PFC								N/A	N/A	N/A
GYR SR MIC STUB XXX 90CM W/STK BC		028750								
GYR SR MIC STUB XXX 90CM W/STK PFC				029950						

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR SR STIC STUB XXX 60CM W/OSTK BC		008850	009920					N/A	N/A	N/A
GYR SR STIC STUB XXX 60CM W/OSTK PFC								N/A	N/A	N/A
GYR SR MIC STUB XXX 60CM W/OSTK BC										
GYR SR MIC STUB XXX 60CM W/OSTK PFC				029350						
GYR SR STIC STUB XXX 90CM W/OSTK BC								N/A	N/A	N/A
GYR SR STIC STUB XXX 90CM W/OSTK PFC								N/A	N/A	N/A
GYR SR MIC STUB XXX 90CM W/OSTK BC										
GYR SR MIC STUB XXX 90CM W/OSTK PFC										

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.


Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

GYRONET™ SRD

Head only with Standard upper bearing

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC	3/8IC
027	012530	031825	N/A
040	012550	031850	N/A
058	013810	033110	N/A
070	013850	033150	077405
090	015105	034405	077600
120	015150	034450	
150	016500	035700	
200	N/A	037500	078200
250	N/A	038500	078210
300	N/A	039500	078215



GyroNet™ SRD STIC, self tapping inlet connector



GyroNet™ SRD MIC, press fit, male inlet connector



GyroNet™ SRD 3/8" male threaded inlet connector

GYRONET™ SRD

head only with Everspin™ upper bearing

Catalog number : **64000** - (any of below 6 digits)

Model	STIC	MIC	3/8IC
027	012532	031826	N/A
040	012555	031860	N/A
058	013812	033111	N/A
070		033160	
090		034406	
120	015160	034460	077820
150			078020
200	N/A		078220
250	N/A		
300	N/A		

GYRONET™ SRD assembly stands

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR SRD STIC STUB XXX 60CM W/STK BC				014250						
GYR SRD STIC STUB XXX 60CM W/STK PFC				014150						
GYR SRD MIC STUB XXX 60CM W/STK BC	031840	032250	033140	033550	034420	034850				
GYR SRD MIC STUB XXX 60CM W/STK PFC										
GYR SRD STIC STUB XXX 90CM W/STK BC			013845			015950				
GYR SRD STIC STUB XXX 90CM W/STK PFC										
GYR SRD MIC STUB XXX 90CM W/STK BC		032650		033950						
GYR SRD MIC STUB XXX 90CM W/STK PFC		032550		033850	034415	035150				

Catalog number : **64000** - (any of below 6 digits)

MODEL	027	040	058	070	090	120	150	200	250	300
GYR SR STIC STUB XXX 60CM W/OSTK BC										
GYR SR STIC STUB XXX 60CM W/OSTK PFC										
GYR SR MIC STUB XXX 60CM W/OSTK BC										
GYR SR MIC STUB XXX 60CM W/OSTK PFC										
GYR SR STIC STUB XXX 90CM W/OSTK BC	012540			014450						
GYR SR STIC STUB XXX 90CM W/OSTK PFC				014350						
GYR SR MIC STUB XXX 90CM W/OSTK BC										
GYR SR MIC STUB XXX 90CM W/OSTK PFC		032350				034950				

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



GYRONET™ UD

UP-SIDE DOWN

APPLICATIONS

For application where sprinklers are mounted inverted to keep the ground clear and prevent damage to the sprinklers by harvesters and machinery.

SPECIFICATIONS

- Special designed up side down rotor.
- Micro-sprinkler, 3 different flow rates: 40, 58, 70 l/h.
Nominal flow rates at 1.7 bar pressure.
- Maximum recommended working pressure: 2.5 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 2 types of inlet connectors:
Self tapping
Press fit
- Upper bearing:
A specially designed spring bearing keeps the anti-ant feature even when the sprinkler is mounted in an up side down position.
- The rotor is colored Green.

FEATURES AND BENEFITS

- Anti-ant mechanism prevents insect penetration into the area of the micro-sprinklers nozzle.
- Micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
Simple, modular parts

GYRONET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED DIAMETER (M) UD 50 CM ABOVE GROUND	SWIVEL (ROTOR) CODE COLOR
040	Blue	0.90	9.4	0.5	2.5	5.5	Green
058	Gray	1.10	13.5	0.5	2.5	7.0	Green
070	Black	1.20	17.4	0.5	2.5	7.0	Green


PACKAGING DATA

GYRONET™ UD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	1000	28 x 28 x 57	12.5	32	32000	412
Complete stand, 30 cm tube length with stabilizer	150	28 x 28 x 57	10.1	32	4800	323
Complete stand, 60 cm tube length with stabilizer	150	18 x 34 x 79	10.5	20	3000	210
Complete stand, 90 cm tube length with stabilizer	150	28 x 27 x 113	11.4	16	2400	183

GYRONET™ UD

Flowchart to determine the desired product definition


How to use: To determine the desired product definition select one of every set of options displayed on the chart.

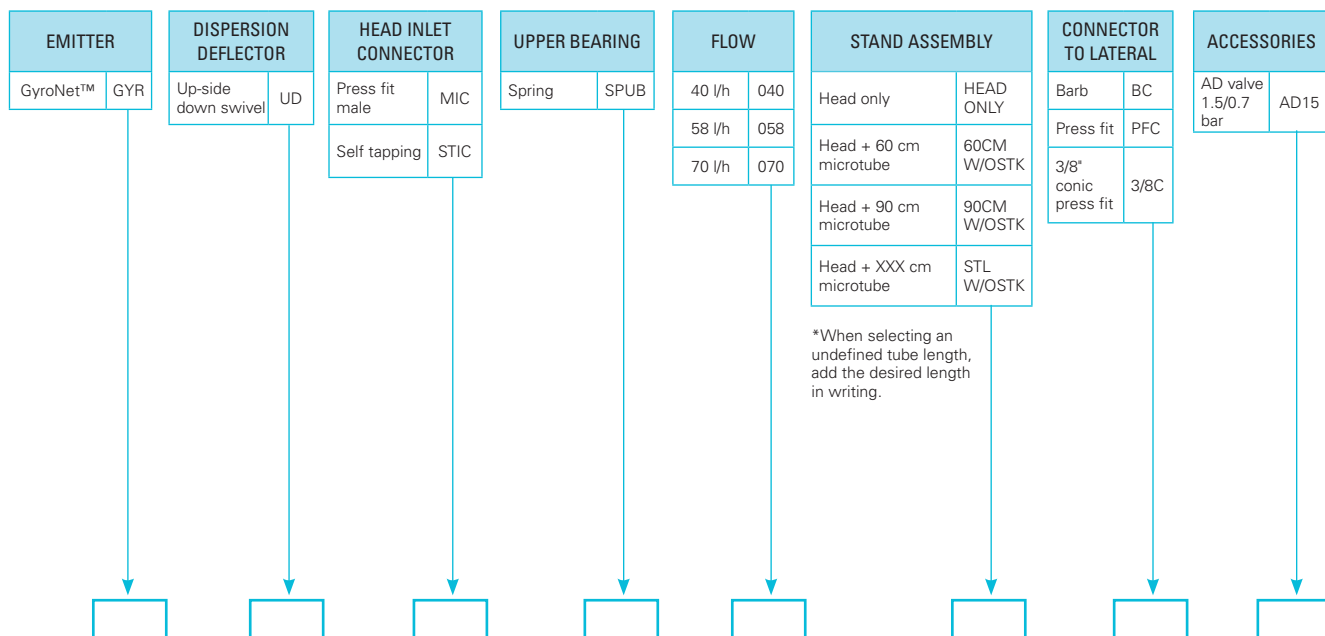

GYRONET™ UD

head only with Standard upper bearing
Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040	098990	090990
058	099990	091990
070	100990	092990




GyroNet™ UD STIC, self tapping inlet connector

GYRONET™ UD

head only with Spring upper bearing
Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040	099000	091000
058	100000	092000
070	101000	093000
090	102000	009400



GyroNet™ UD MIC, press fit, male inlet connector

GYRONET™ UD assembly stands
Catalog number : **64000** - (any of below 6 digits)

MODEL	040	058	070
GYR UD STIC STUB XXX 30CM W/STB PFC			
GYR UD STIC STUB XXX 60CM W/STB PFC	099200		
GYR UD MIC STUB XXX 30CM W/STB PFC	091200	092200	
GYR UD MIC STUB XXX 60CM W/STB PFC			

Missing catalog numbers available upon request.
Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm black SPE micro-tube.
Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.





GYRONET™ JET

APPLICATIONS

Designed for harsh water containing large amounts of sand thus causing excessive wear of standard rotating swivel.

SPECIFICATIONS

- A static emitter.
- Micro-emitter, 5 different flow rates: 40, 58, 70, 90, 120 l/h.
Nominal flow rates at 1.7 bar pressure.
- Maximum recommended working pressure: 2.5 bar.
- Recommended filtration: 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 2 types of inlet connectors:
Self tapping
Press fit
- Upper bearing:
Special type of upper bearing (square hole) holds the rotor from spinning
- 5 types of static deflectors:
360 degrees (12 jets)
300 degrees (10 Jets)
2x90 (butterfly) (8 jets)
180 degrees (6 jets)
90 degrees (4 jets)
- All 5 deflectors are colored Orange.

FEATURES AND BENEFITS

- Anti-ant mechanism prevents insect penetration into the area of the micro-emitters nozzle.
- Static-emitter made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Long-term reliable service:
Simple, modular parts

GYRONET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED RADIUS (M) 20 CM ABOVE GROUND					DEFLECTOR CODE COLOR
						360 DEGREES 12 JETS	300 DEGREES 10 JETS	BUTTERFLY 2*4 JETS	180 DEGREES 6 JETS	90 DEGREES 4 JETS	
040	Blue	0.90	9.4	0.5	2.5	2.3	2.9	2.6	3.1	2.4	Orange
058	Gray	1.10	13.5	0.5	2.5	2.6	3.0	2.9	3.4	3.4	Orange
070	Black	1.20	17.4	0.5	2.5	2.8	3.4	3.0	3.4	3.7	Orange
090	Orange	1.40	22.4	0.5	2.5	3.2	3.6	3.2	4.0	3.0	Orange
120	Red	1.57	28.8	0.5	2.5	3.7	4.1	3.7	4.0	3.8	Orange


PACKAGING DATA

GYRONET™ JET	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	1000	28 x 28 x 57	12.5	32	32000	412
Complete stand (60 cm) w/stake	100	18 x 34 x 79	6.3	20	2000	137
Complete stand (60 cm) w/o stake	250	18 x 34 x 79	7.1	20	5000	153
Complete stand (90 cm) w/stake	150	28 x 27 x 113	7.6	18	2700	147
Complete stand (90 cm) w/o stake	200	28 x 27 x 113	8.1	18	3600	155

GYRONET™ JET

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

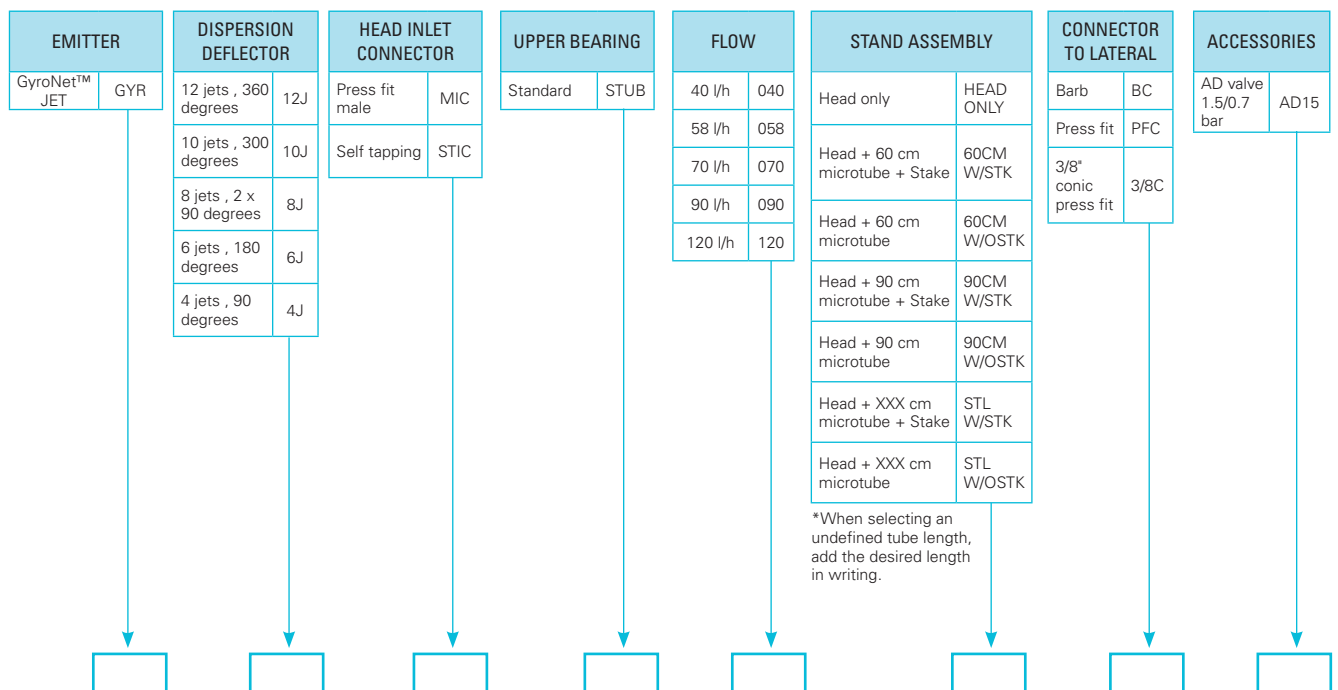

GYRONET™ JET

12 jets, head only

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040	001015	020310
058		021562
070	002310	021610
090	018000	022856
120		




GyroNet™ Jet MIC, press fit, male inlet connector

GYRONET™ JET

10 jets, head only

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040	016670	
058	002266	021563
070		
090		
120		



GyroNet™ Jet STIC, self tapping inlet connector

GYRONET™ JET

8 jets, head only

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040	016700	020320
058		
070		
090	018005	
120		

GYRONET™ JET

6 jets, head only

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040		020325
058		021565
070		021625
090		022859
120		022920

GYRONET™ JET

4 jets, head only

Catalog number : **64000** - (any of below 6 digits)

MODEL	STIC	MIC
040		020330
058		
070		021630
090		
120		

GYRONET™ JET assembly stands

Catalog number : **64000** - (any of below 6 digits)

MODEL	040	058	070	090	120
GYR JET 12 JET MIC STUB XXX 60CM W/STK BC	020311				
GYR JET 10 JET MIC STUB XXX 60CM W/STK BC				022870	
GYR JET 8 JET (2*90) MIC STUB XXX 60CM W/STK BC					
GYR JET 6 JET MIC STUB XXX 60CM W/STK BC	020326				
GYR JET 4 JET MIC STUB XXX 60CM W/STK BC	020332				

Missing catalog numbers available upon request.

Background color defines the code color of the respective deflector. All assembly stands include 4*6.5 mm black SPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

GYRONET™ COMPONENTS

STANDARD UPPER BEARING CIRCULAR HOLE - TO BE USED ON ALL GYRONET™ MICRO- SPRINKLERS		STANDARD UPPER BEARING SQUARE HOLE - TO BE USED ON ALL GYRONET™ MICRO-JETS (GRAY)		EVERSPIN™ UPPER BEARING CIRCULAR HOLE - TO BE USED ON ALL GYRONET™ MICRO- SPRINKLERS IN HARSH WATER CONDITIONS		SPRING UPPER BEARING CIRCULAR HOLE - TO BE USED ON UD GYRONET™ MICRO- SPRINKLERS	
1 unit 63520-005450		1 unit 63520-005400		1 unit 63520-011400		1 unit 63520-011500	
100 units/bag 63520 -005470		100 units/bag 63520-005420		100 units/bag 63520-011425		100 units/bag 63520-011530	

FRAME		STREAM SPLITTER	
1 unit 63520-005500		1 unit 63520-005800	
10 units/bag 63520-005525		10 units/bag	
100 units/bag 63520-005510		100 units/bag 63520-005830	

LR SWIVEL (PURPLE) TO BE USED WITH 27, 40 L/H		LR SWIVEL (BLACK) TO BE USED WITH 58, 70, 90, 120 L/H		SR SWIVEL (BLUE) TO BE USED WITH ALL FLOWS	
1 unit 63520-005100		1 unit 63520-005000		1 unit 63520-005200	
10 units/bag 63520-005102		10 units/bag 63520-005005		10 units/bag 63520-005205	
100 units/bag 63520-005115		100 units/bag 63520-005010		100 units/bag 63520-005220	

LRD SWIVEL (PURPLE) TO BE USED WITH 27, 40 L/H		LRD SWIVEL (BLACK) TO BE USED WITH 58, 70, 90, 120 L/H		SRD SWIVEL (BLUE) TO BE USED WITH ALL FLOWS	
1 unit 63520-005160		1 unit 63520-005150		1 unit 63520-005300	
10 units/bag 63520-005165		10 units/bag		10 units/bag	
100 units/bag 63520-005170		100 units/bag 63520-005155		100 units/bag 63520-005310	

UD SWIVEL (GREEN) W/SLEEVE TO BE USED WITH 40, 58, 70 L/H		LR SWIVEL (GRAY) TO BE USED WITH 150, 200, 250, 300 L/H		STATIC DEFLECTORS TO BE USED WITH 40, 58, 70, 90, 120 L/H	
1 unit 63520-005180		1 unit 63520-005120			
10 units/bag 63520-005185		10 units/bag 63520-005122			
100 units/bag 63520-005188		100 units/bag 63520-005125			

GYRONET™ BODY NOZZLES	MALE (PRESS-FIT) INLET CONNECTOR	SELF-TAPPING INLET CONNECTOR	3/8" THREADED MALE INLET CONNECTOR	
				
	27 l/h, Brown	64020-000800	64020-000900	N/A
	40 l/h, Blue	64020-001000	64020-001100	N/A
	58 l/h, Gray	64020-001130	64020-001150	N/A
	70 l/h, Black	64020-001300	64020-001200	64020-001190
	90 l/h, Orange	64020-001310	64020-001210	64020-001320
	120 l/h, Red	64020-001500	64020-001400	64020-001560
	150 l/h, Sky Blue	64020-001700	64020-001600	64020-001730
	200 l/h, Yellow	64020-001750	N/A	64020-001775
	250 l/h, Purple	64020-001850	N/A	64020-001776
	300 l/h, Green	64020-001950	N/A	64020-001777

12 jets (360 degrees)	63520-005350	63520-005355
10 jets (300 degrees)	63520-005360	63520-005365
8 jets (2*90 degrees)	63520-005370	63520-005375
6 jets (180 degrees)	63520-005380	63520-005385
4 jets (90 degrees)	63520-005390	63520-005397



VIBRONET™ SD

APPLICATIONS

Orchards, deciduous and tree crops irrigation.

SPECIFICATIONS

- Bridgeless micro emitter with vibrating action.
- Micro-emitter, 3 different flow rates: 30, 50, 70 l/h.
- Nominal flow rates at 1.5 bar pressure.
- Recommended working pressure: 1.0 - 2.0 bar.
- Recommended filtration: 130 micron / 120 mesh.

Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter.

When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.

- Inlet connector: press fit.

FEATURES AND BENEFITS

- Excellent uniformity distribution as a single emitter.
- Operation of this emitter is based on vibration. Water passage through the nozzle causes needle vibration which in turn breaks up the water jet into uniform droplets that are evenly spread.
- Large drops suitable for open field conditions. No mist / wind-borne small drops.
- Relatively small wetting diameter, suits especially densely planted fruit tree crops.
- Constantly self-cleaning, the vibrating system does not allow for build up of mineral deposits in the nozzle.
- Micro-emitter made of plastic materials resistant to all agrochemicals & weather conditions.

VIBRONET™ SD TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	PIN CODE COLOR	NOZZLE WATER PASSAGES AREA (MM²)	NOZZLE SMALLER WATER PASSAGES (MM)	CONSTANT K	EXPONENT X	WETTED DIAMETER (M) 20 CM ABOVE GROUND*
30	28.6	Green + Sky Blue	Light Gray	0.7	0.34	6.6	0.54	1.5
50	50.5	Green + Light Gray	Orange	1.9	0.68	11.7	0.54	1.7
70	72.9	Black + Black	Orange	3.0	0.99	16.9	0.54	2.0

* at 1.5 bar working pressure


PACKAGING DATA

VIBRONET™ SD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	3200	28 x 28 x 57	19.2	32	102400	614

VIBRONET™ SD

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

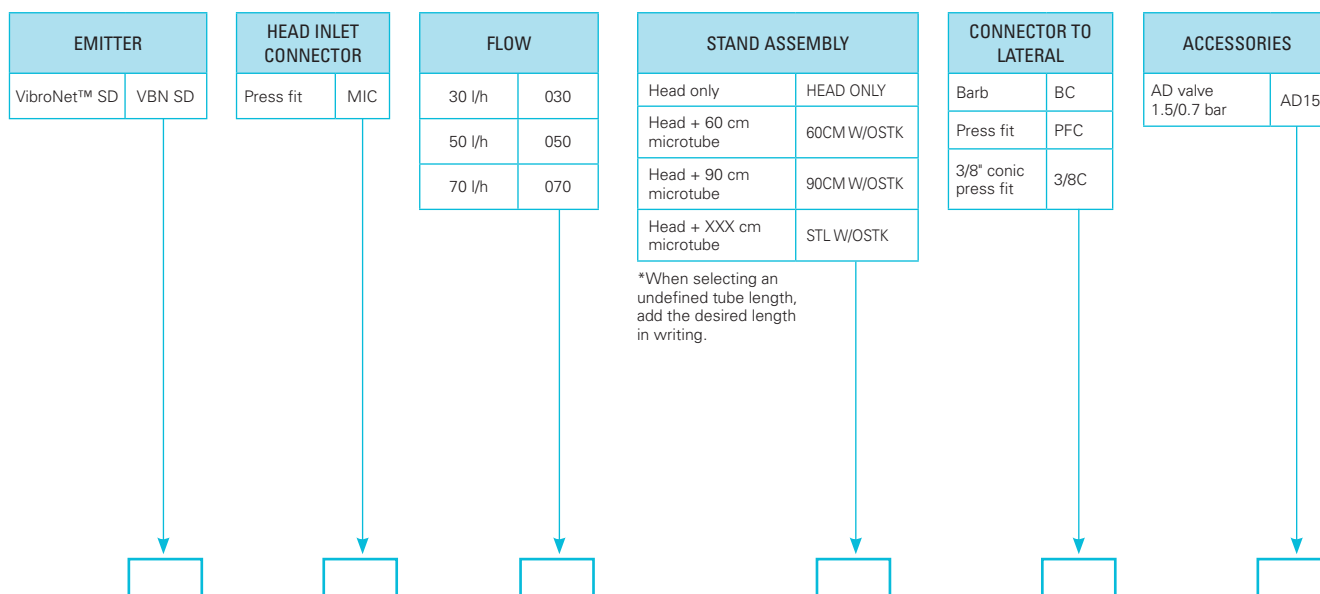

VIBRONET™ SD

Head only (with male inlet connector)

Catalog number: **64300** - (any of below 6 digits)

MODEL	
030	010000
050	011000
070	012000



VibroNet™ SD

CONNECTORS AND STAND ACCESSORIES

SUPERNET™ STAKE Colored Blue 63520-005900 Colored Brown 63520-010350 Colored Black 63520-010450		CLAMP FOR WOOD POLES 64420-003100		ADAPTER TO METAL/ FIBERGLASS RODS 6.0 mm rod (Blue) 63520-005950 8.0 mm rod (Black) 63520-005970	
UNIVERSAL STAKE Colored Blue 63000-009800 Colored Black 63000-009750 Colored Brown 63000-009850		CLAMP FOR METAL STAKES 64420-003010		METAL ROD 6.0 mm dia., 60 cm length 65080-001000 6.0 mm dia., 100 cm length 65080-001100 6.0 mm dia., 120 cm length 65080-001200 8.0 mm dia., 60 cm length 65080-001500 8.0 mm dia., 100 cm length 65080-001600 8.0 mm dia., 120 cm length 65080-001700	
CLIP STAKE Colored Black 63000-009860					
UNIVERSAL ADAPTER TO METAL/FIBERGLASS ROD 	ADAPTER BARB/FEMALE PRESS-FIT Adapter barb (for 6*8 mm tube) / female press-fit connector 64020-002750 Adapter barb (for 9*12 mm tube) / female press-fit connector 64020-002760 				
To 4.5 mm dia. rod, 4*6.5 mm micro-tube, colored black 64020-002150 To 6.0 mm dia. rod, 4*6.5 mm micro-tube, colored blue 64020-002000 To 8.0 mm dia. rod, 4*6.5 mm micro-tube, colored black 64020-002100 To 6.0 mm dia. rod, 6*8 mm micro-tube, colored blue 64020-003100 To 6.0 mm dia. rod, 9*11/9*12 mm micro-tube, colored blue 64020-003150 To 8.0 mm dia. rod, 9*11/9*12 mm micro-tube, colored black 64020-003170	ADAPTER FEMALE THREADED/ FEMALE PRESS-FIT  1/2" female threaded / female press-fit conn 63000-001200 3/4" female threaded / female press- fit conn 63000-001300 ADAPTER BARB-3/8" FEMALE THREADED  Barb (for 9*11/9*12 mm tube) / 3/8" female threaded 63000-001835				

BARB/MALE PRESS-FIT CONNECTOR (BLACK) 63000-002000		BARBED, PRESSURE MEASURING POINT 63000-002800		BARB/FLAT FEMALE PRESS-FIT CONNECTOR 63000-002450	
BARB/BARB CONNECTOR (BLACK) 63520-006000		1/4" UNF MALE THREADED, PRESSURE MEASURING POINT ON A PVC PIPE, DRILL: 5.2 MM SCREW-TAP: 1/4-28 UNF 63000-002700		PLUG (BLUE) 63000-002400	
BARB/SELF TAPPING CONNECTOR (BLACK) 63520-006100		1/8" BSP MALE THREADED, PRESSURE MEASURING POINT ON A PVC PIPE, DRILL: 8.5 MM SCREW-TAP: 1/8-28 BSP 63000-002750		MALE THREADED / FEMALE PRESS-FIT 3/8" Threaded male/female conn. 63000-001150 1/2" Threaded male/female conn. 63000-001180	
SELF TAPPING/SELF TAPPING CONNECTOR (BLACK) 63520-006150		FLARE/FLARE COUPLING CONNECTOR Fit 9*11/9*12 mm micro-tube 100 units/bag 32500-030760		START CONNECTOR BARB/FEMALE Barb to be connected to a PE distributor pipe/ Flare connector to a 9*11/9*12 mm micro-tube 100 units/bag 32500-030820	
BARB/FEMALE PRESS-FIT CONNECTOR (BLACK) 63000-001900		"U" SHAPE FOR UPRIGHT HANGING 63520-005990		SUPERNET™ AND GYRONET™ NOZZLE CLEANING TOOL 63520-011000	



PC SPRAY STAKES

PRESSURE COMPENSATED SPRAY STAKE

APPLICATIONS

For all mini-spray nurseries and greenhouses applications.

SPECIFICATIONS

- High flow rates to supply correct irrigation in large pots/growing bags.
- PC spray stake is ideal for any application in which a soil wetting mini spray pattern is desired.
- PC spray stake is manufactured with UV resistant resin to provide years of trouble-free service in both indoor and outdoor applications.
- Optional CNL (anti drain system).
- 2 spray patterns adaptable to suit every substrate surface or container.
- Recommended filtration: 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.

FEATURES AND BENEFITS

- Pressure compensated flow ensuring constant flow rate at varying inlet pressures.
- Optional CNL:
When pressure in the pipes drops (after valves shut off at the end of an irrigation cycle) and the desired pressure is achieved, the CNL mechanism closes the water passage. The pipes remain full of water and ready for the next cycle.
- Ensures uniform water and nutrient distribution during irrigation.
- Allows the installation of spray stake systems in areas with steeper slopes.
- Uniform wetting pattern over the entire surface.
- Horizontal connection.
- Water flow blockage mechanism to function when a pot is sold and/ or shifted from position to prevent water and fertilizer loss.
- Pre-assembled components for easy of use.
- Excellent performance.

PC SPRAY STAKE COMPONENTS

NOMINAL FLOW RATE (L/H)*	SPRAY STAKE COLOR CODE	SPREAD DESCRIPTION	AVERAGE WETTED RADIUS (M)**	FLOW REGULATOR CODE COLOR
12	Fuchsia	One side	0.22-0.25	Fuchsia + Black
20	Gray	One side	0.22-0.25	Orange + Black
20	Light Gray	Two sides	0.22-0.25	Orange + Black
25	Gray	One side	0.22-0.25	Orange + Light Gray
25	Light Gray	Two sides	0.22-0.25	Orange + Light Gray
30	Brown	One side	0.22-0.25	Orange + Brown
30	Light Brown	Two sides	0.22-0.25	Orange + Brown
35	Blue	One side	0.22-0.25	Orange + Light Blue
35	Light Blue	Two sides	0.22-0.25	Orange + Light Blue
40	Blue	One side	0.22-0.25	Orange + Blue
40	Light Blue	Two sides	0.22-0.25	Orange + Blue

* Within pressure range 1.5-4.0 bar (1.8-4.0 bar in the 40 l/h model)

**To each side, wetted radius will change at different height above ground of the spray head

PACKAGING DATA

QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET
500	27 x 28 x 113	9.5	16

PC SPRAY STAKES ASSEMBLY , PCJ HF YY l/h , 3*5 mm micro-tube 100 cm length, elbow adapter
Catalog number : **40200** - (any of below 6 digits)

PCJ MODEL	PC SPRAY STAKE	WATER DISTRIBUTION	1 UNIT
12 l/h	Fuchsia	One side	035100
20 l/h	Gray	One side	035200
20 l/h	Light Gray	Two sides	035300
25 l/h	Gray	One side	035400
25 l/h	Light Gray	Two sides	035500
30 l/h	Brown	One side	037200
30 l/h	Light Brown	Two sides	037300
35 l/h	Blue	One side	037600
35 l/h	Light Blue	Two sides	037700
40 l/h	Blue	One side	037800
40 l/h	Light Blue	Two sides	037900

*Can be ordered with different micro-tube lengths

PC-CNL SPRAY STAKES ASSEMBLY , PCJ-CNL HF YY l/h , 3*5 mm micro-tube 100 cm length, elbow adapter
Catalog number : **40200** - (any of below 6 digits)

PCJ MODEL	PC SPRAY STAKE	WATER DISTRIBUTION	1 UNIT
12 l/h	Fuchsia	One side	036000
20 l/h	Gray	One side	036100
20 l/h	Light Gray	Two sides	036200
25 l/h	Gray	One side	036300
25 l/h	Light Gray	Two sides	036400
30 l/h	Brown	One side	038500
30 l/h	Light Brown	Two sides	038600
35 l/h	Blue	One side	038700
35 l/h	Light Blue	Two sides	038800
40 l/h	Blue	One side	038900
40 l/h	Light Blue	Two sides	039000

*Can be ordered with different micro-tube lengths



SPRAY STAKE

APPLICATIONS

Greenhouses, nurseries, garden pot irrigation.

SPECIFICATIONS

- Maximal working pressure: 2.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Made of durable plastic with high levels of UV inhibitors.
- Available in three colors for easy identification of flow rates:
 - 12 l/h – Yellow
 - 17 l/h – Green
 - 22 l/h – Black
- Container size recommendations:
 - 12 to 20 liters - Yellow Spray Stake
 - 20 to 40 liters - Green Spray Stake
 - 40 to 120 liters - Black Spray Stake
- To be "inserted" into a 3*5 mm micro-tube.

FEATURES AND BENEFITS

- Allow distribution of water over relatively large pot plant areas.
- Netafim™ Spray Stakes now have a spray direction indicator for faster, accurate installations. The directional indicator provides a hand-feel as well as visual cue to the spray direction so installers don't need to stop and study each stake to ensure proper spray direction.
- Netafim™ Spray Stakes feature close-off capabilities that are simple and quick , remove the tubing from the top of the Spray Stake and attach the tubing to the close-off nipple located on the side of the stake.. This eliminates dirt getting jammed into the tubing and provides a highly visible cue that the stake is closed, not open.
- Allows maximum flexibility in greenhouse and nurseries (with soft PE micro-tubes).
- Allows installation with Netafim™ On line PC drippers, to add compensated and anti-drain functionality.

SPRAY STAKE TECHNICAL DATA

MAXIMUM WORKING PRESSURE (BAR)	NOMINAL FLOW RATE (L/H)*	WATER PASSAGES DIMENSIONS**			CONSTANT K	EXPONENT X
		WIDTH (MM)	DEPTH (MM)	LENGTH (MM)		
2.0	12.0	1.04	0.73	10.50	3.795	0.50
	17.0	1.34	1.05	10.50	5.376	0.50
	22.0	1.57	1.30	10.50	6.957	0.50

* At 1.0 bar pressure

**The Spray Stake water passages has a triangular shape

PACKAGING DATA

STAKE MODEL	NOMINAL FLOW (L/H)	QUANTITY UNITS	DIMENSIONS (CM X CM X CM)	BOX WEIGHT (KG)
Yellow	12	2000	28 x 28 x 57	5.5
Green	17	2000	28 x 28 x 57	5.5
Black	22	2000	28 x 28 x 57	5.5

SPRAY STAKES

Catalog number : **22500** - (any of below 6 digits)

MODEL	1 UNIT	100/BAG	500/BAG	1000/BOX
12	001000	001020	001035	001041
17	001100	001120	001135	001141
22	001200	001220		001240



SPRAY STAKES + assembly butterfly

Catalog number : **22500** - (any of below 6 digits)

MODEL	1 UNIT
12	000700
17	000800
22	000900

SPRAY STAKES ACCESSORIES

Butterfly stopper	1 unit	22500-001300
	100/bag	22500-001330
Extension unit	1 unit	22500-001400
	50/bag	22500-001420

Missing catalog numbers available upon request



SPINNET™

BRIDGELESS MICRO-SPRINKLER

APPLICATIONS

Greenhouses, Nurseries, Net-houses.

SPECIFICATIONS

- Bridgeless design.
- Micro-sprinkler, 6 different flow rates: 50, 70, 90, 120, 160, 200 l/h.
Nominal flow rates at 2.3 bar pressure.
- Recommended working pressure: 2.0 up to 3.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connector: Press fit.
- 3 different rotors:
 - LR - High trajectory, colored Green
 - FLT - Flat distributor, colored Gray
 - SR - Low trajectory , colored Blue
- SpinNet™ micro-sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- SpinNet™ micro-sprinklers are constructed without a "bridge" to retain the spinner, producing a drip-less operation. This means that plants located below the sprinklers are not damaged from water dripping off the sprinkler. SpinNet™ hangs below the supply pipe preventing wetting of the pipe and dripping onto the plants below.
- Interchangeable components. SpinNet™ micro-sprinklers can be disassembled by hand should they need cleaning - no tools are required.
- Acid resistant (AA) raw materials, thus allowing the application chemicals to pass through the system. The system can be cleaned by application of suitable acid treatments.
- Excellent uniformity distribution on a full coverage irrigation system.
- Strongly recommended to connect the SpinNet™ to the distribution pipe with a SSPE (super soft PE) micro-tube, a specifically designed stabilizer and AD valve (anti-drain) that will prevent distribution pipe drainage.

SPINNET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	RECOMMENDED WORKING PRESSURE (BAR)	CONSTANT K	EXPONENT X	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR LR	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR FTL	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR SR
050	Green	0.90	2.0 to 3.0	10.5	0.5	N/A	N/A	N/A	N/A	6.0	Blue
070	Black	1.07	2.0 to 3.0	14.0	0.5	8.0	Green	7.5	Gray	6.5	Blue
090	Orange	1.22	2.0 to 3.0	18.9	0.5	8.5	Green	8.5	Gray	6.5	Blue
120	Red	1.44	2.0 to 3.0	25.0	0.5	8.5	Green	8.5	Gray	6.5	Blue
160	Brown	1.76	2.0 to 3.0	33.6	0.5	9.0	Green	9.0	Gray	6.5	Blue
200	Yellow	1.86	2.0 to 3.0	41.4	0.5	9.5	Green	9.0	Gray	7.0	Blue

The wetted diameter was measured at 1.5 meters height and at 2.5 bar working pressure


PACKAGING DATA

SPINNET™	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	1500	28 x 28 x 57	11.5	32	48000	380
Complete stand, 15 cm tube w/stabilizer and AD valve	200	28 x 28 x 57	13.1	32	6400	419
Complete stand, 30 cm tube w/stabilizer and AD valve	200	28 x 28 x 57	14.8	32	6400	486
Complete stand, 60 cm tube w/stabilizer and AD valve	150	18 x 34 x 79	12.4	20	2000	249
Complete stand, 90 cm tube w/stabilizer and AD valve	200	28 x 27 x 113	15.8	16	3200	253

SPINNET™

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

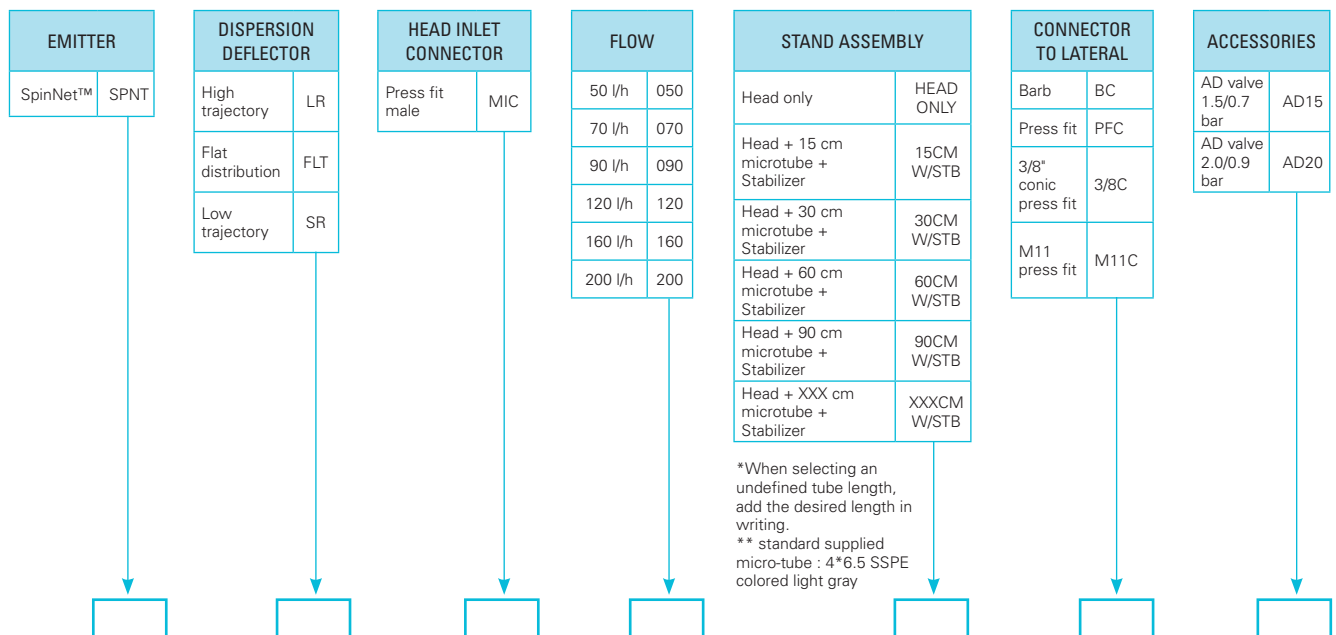


SPINNET™


Head only

Catalog number: **64200** - (any of below 6 digits)


MODEL	LR		FLT		SR	
	1 Unit	100 Units/bag	1 Unit	100 Units/bag	1 Unit	100 Units/bag
050	N/A	N/A	N/A	N/A	023000	
070	010000	010020	005000	005002	024000	024020
090	013000	013020	006000	006010	025000	025020
120	017500	017520	007000	007010	026000	026020
160	020000	020020	007500	007510	027000	027020
200	021300	021320	008000	008005	028000	028020



SpinNet™ LR, green swivel



SpinNet™ FLT, gray swivel



SpinNet™ SR, Blue swivel

SPINNET™

Head + AD valve 20

Catalog number : **64200** - (any of below 6 digits)

MODEL	LR	FLT	SR
050	N/A	N/A	
070	010070	005075	
090			
120			
160			
200			

SPINNET™ ASSEMBLY STANDS

SpinNet™, UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 20 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070		010400		
090		013600		
120		018200		
160		020800		
200		022000		022500

SpinNet™, UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 20 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	010200	010410		
090	013300	013320		
120	017800	018250		
160	020105			
200	021600	022100		

SpinNet™, UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 20 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	005009	005100	005120	005400
090		006100	006145	
120		007100	007120	007320
160		007750		
200		008100		

SPINNET™ ASSEMBLY STANDS

SpinNet™, UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe and AD valve 15 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	010110	010350	010160	
090		013150	013185	
120		017660		
160				
200				

SpinNet™, UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe and AD valve 15 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	010100	010360	010150	
090	013100	013155	013180	
120	017600	017650	017700	
160	020100	020190	021500	
200	021400	021450		

SpinNet™, UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe and AD valve 15 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	005008	005005	005032	005050
090		006032	006050	006065
120	007017	007027	007037	
160				007710
200				

SpinNet™, UD stand, FLT swivel, Flow YYY, micro-tube length XXX, stabilizer, press-fit connector to lateral pipe, AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	005080	005150	005300	
090	006070	006120	006140	
120	007045	007150	007200	007330
160			007850	
200	008070	008150	008300	

SpinNet™, UD stand, SR swivel, Flow YYY, micro-tube length XXX, stabilizer, barb connector to lateral pipe, AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
050				
070				
090		025100		
120				
160	026300	026350		
200				

SpinNet™, UD stand, SR swivel, Flow YYY, micro-tube length XXX, stabilizer, press-fit connector to lateral pipe, AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
050		023020		
070				
090				
120		026150		
160	026360			
200				

SpinNet™, UD stand, FLT swivel, Flow YYY, micro-tube length XXX, stabilizer, press-fit connector to lateral pipe and AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
070	005010	005020	005030	
090	006020	006030		006060
120	007015	007025	007035	
160		007600	007980	
200	007940	007960		

SpinNet™, UD stand, SR swivel, Flow YYY, micro-tube length XXX, stabilizer, barb connector to lateral pipe, AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
050	004100			
070		010350		
090		013150		
120		017660		
160				
200				

SpinNet™, UD stand, SR swivel, Flow YYY, micro-tube length XXX, stabilizer, press-fit connector to lateral pipe, AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
050				
070				
090				
120				
160				
200				

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm gray SSPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

SPINNET™ COMPONENTS

SPINNET™ BODY NOZZLE	
50 l/h, Green	64220-003900
70 l/h, Black	64220-004000
90 l/h, Orange	64220-004100
120 l/h, Red	64220-004200
160 l/h, Brown	64220-004250
200 l/h, Yellow	64220-004300



SPINNET™ DISTRIBUTION MECHANISM	
LR, long range distribution model, Green swivel	64200-001020
FLT, flat distribution model, Gray swivel	64200-001000
SR, short range distribution model, Blue swivel	64200-001030





SPINNET™ SD

BRIDGELESS MICRO-SPRINKLER WITH SHOULDER DISTRIBUTOR



APPLICATIONS

Greenhouses, Nurseries, Tunnels.

SPECIFICATIONS

- Micro-sprinkler with a specifically designed connector (SD – shoulder distributor) that achieves excellent results when rectangular irrigation is needed.
- Bridgeless design.
- Micro-sprinkler, 6 different flow rates : 090/050, 120/070, 160/070, 160/090, 200/090, 200/120 l/h.
Nominal flow rates at 2.0 bar pressure.
- Recommended working pressure: 2.0 up to 3.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connector: Press fit.
- 3 different rotors:
 - LR - High trajectory, colored Green
 - FLT - Flat distributor, colored Gray
 - SR - Low trajectory, colored Blue

FEATURES AND BENEFITS

- Bridgeless design eliminates dripping.
- Interchangeable components. SpinNet™SD micro-sprinklers can be disassembled by hand should they need cleaning - no tools are required.
- Acid resistant (AA) raw materials, thus allowing the application chemicals to pass through the system. The system can be cleaned by application of suitable acid treatments.
- Excellent uniformity distribution on a single irrigation line. Traditional sprinkler layout spaces the sprinklers "head to head" or at spacing equal to the radius of the sprinkler throw. For larger areas, the patterns are overlapped. The SpinNet™ SD solution avoids the problems of the traditional sprinkler layout and achieves a high level of uniformity within a closely spaced "strip of sprinklers".
- Specially designed to fully cover rectangular areas with excellent uniformity distribution and high percentage of the water within the required rectangular area.
- Strongly recommended to connect the SpinNet™SD to the distribution pipe with a SSPE (super soft PE) micro-tube, a specifically designed stabilizer and AD valve (anti-drain) that will prevent distribution pipe drainage.

SPINNET™ SD TECHNICAL DATA

MODEL	NOMINAL FLOW RATE * (L/H)	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	SD CONN NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	RECOMMENDED WORKING PRESSURE (BAR)
090/050	52	Orange + Orange	1.22	1.20	11.6	0.5	2.0 to 3.0
120/070	68	Red + Red	1.44	1.46	15.2	0.5	2.0 to 3.0
160/070	79	Brown + Red	1.76	1.46	17.7	0.5	2.0 to 3.0
160/090	88	Brown + Brown	1.76	1.56	19.7	0.5	2.0 to 3.0
200/090	92	Yellow + Brown	1.86	1.56	20.6	0.5	2.0 to 3.0
200/120	123	Yellow + Yellow	1.86	1.87	27.5	0.5	2.0 to 3.0

*Nominal flow rate at 2.0 bar

MODEL	NOZZLE CODE COLOR	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR LR MODEL	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR FLT MODEL	WETTED DIAMETER (M)	SWIVEL (ROTOR) CODE COLOR SR MODEL
090/050	Orange + Orange	N/A	N/A	N/A	N/A	5.5	Blue
120/070	Red + Red	7.5	Green	7.5	Gray	6.0	Blue
160/070	Brown + Red	6.5	Green	6.0	Gray	5.5	Blue
160/090	Brown + Brown	7.0	Green	6.5	Gray	5.5	Blue
200/090	Yellow + Brown	6.5	Green	6.5	Gray	5.5	Blue
200/120	Yellow + Yellow	8.0	Green	7.5	Gray	6.5	Blue

The wetted diameter was measured at 1.5 meters height and at 2.5 bar working pressure


PACKAGING DATA

SPINNET™ SD	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head & SD connector	1250	18 x 34 x 79	12.9	20	25000	268
Complete stand (30 cm) w/stabilizer & AD valve	150	28 x 28 x 57	11.5	32	4800	368
Complete stand (60 cm) w/stabilizer & AD valve	100	18 x 34 x 79	8.4	20	2000	176

SPINNET™ SD

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.



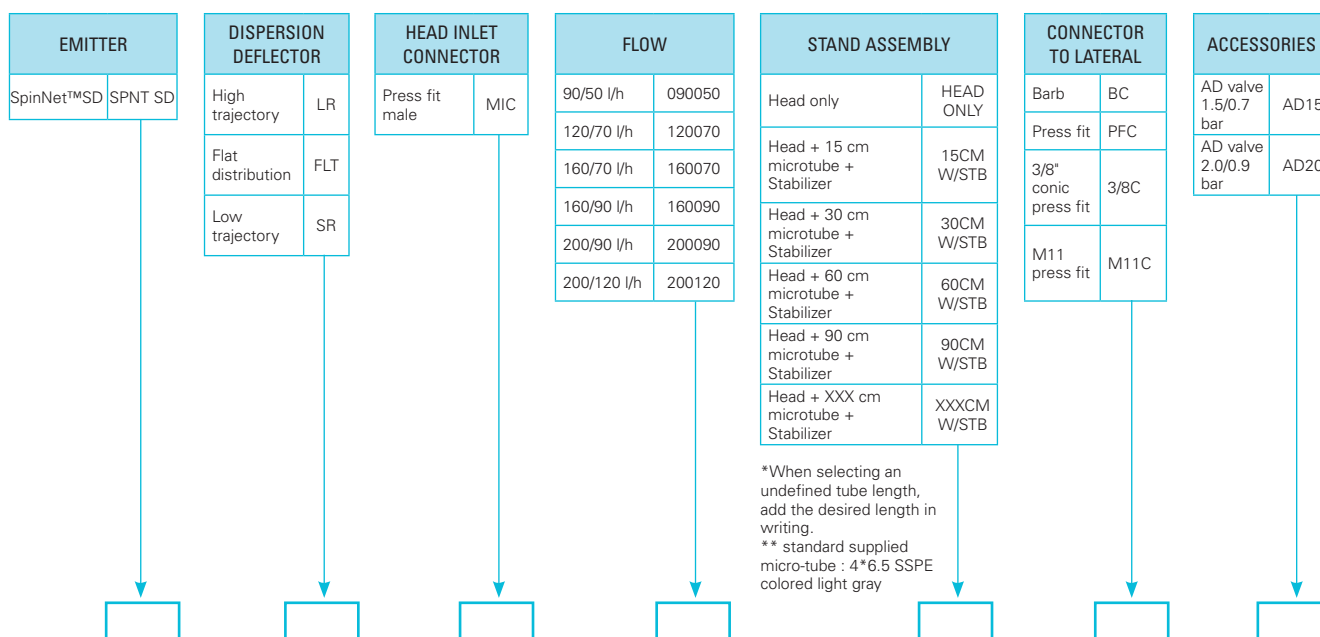


SPINNET™ SD

Head only

Catalog number: **64200** - (any of below 6 digits)

MODEL	LR		FLT		SR	
	1 Unit	25 Units/bag	1 Unit	25 Units/bag	1 Unit	25 Units/bag
090050	N/A	N/A	N/A	N/A	031950	
120070	010750	010760	001250	001255	032000	032010
160070	012250		001460		032950	
160090	013950	013960	001600		033000	033010
200090	014090		001780	001785	033100	
200120	014720		001840		034000	

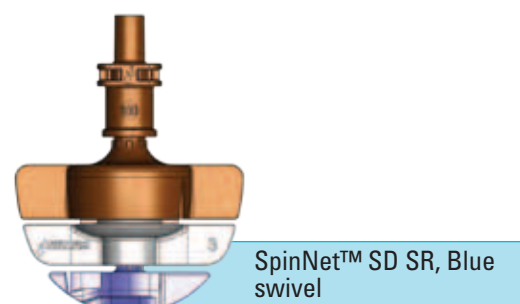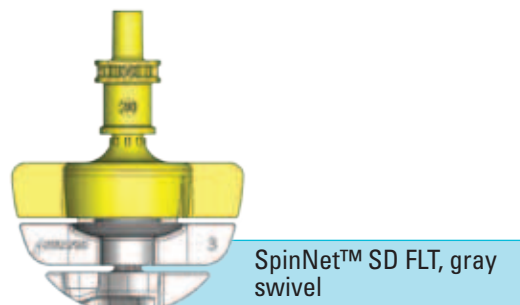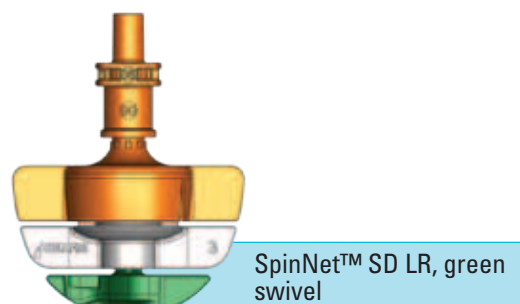

SPINNET™ SD

Head + AD valve 20

Catalog number : **64200** - (any of below 6 digits)

MODEL	LR		FLT		SR	
	1 Unit	25 Units/bag	1 Unit	25 Units/bag	1 Unit	25 Units/bag
090050	N/A		N/A			
120070	010800	010805	001300	001302	032020	032030
160070			001490			
160090	014000	014005	001650		033020	033030
200090			001800	001805		
200120	018700		001850	001855		

SPINNET™ SD ASSEMBLY STANDS

SpinNet™ SD , UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070	011500	011800		
160070				
160090		014600		
200090		014700		
200120				

SpinNet™ , UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 20 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070	011805	011810		
160070		001675		
160090			014652	
200090				
200120				

SPINNET™ SD ASSEMBLY STANDS

SpinNet™ SD , UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070				
160070				
160090				
200090				
200120				

SpinNet™ , UD stand, LR swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 15 , Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070			011900	
160070				
160090		014550	014740	014660
200090	014310			
200120				

SpinNet™ SD , UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe, AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050		001100		
120070				
160070				
160090				
200090				
200120	002000	002100		002020

SpinNet™ SD , UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe, AD valve 20, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070	001305	001310		001380
160070		001520		
160090		001655		
200090				
200120				002030

SpinNet™ , UD stand, SR swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe, AD valve 20 ,Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070				
160070				
160090				
200090				
200120				

SpinNet™ SD , UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe, AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070				
160070				
160090				
200090				
200120				

SpinNet™ SD , UD stand, FLT swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe, AD valve 15, Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070			001350	
160070				
160090			001670	
200090				
200120		001970	001980	

SpinNet™ , UD stand, SR swivel , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 20 ,Catalog number : **64200** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
090050				
120070				
160070				
160090				
200090				
200120				

Missing catalog numbers available upon request.

Background color defines the code color of the respective swivel. All assembly stands include 4*6.5 mm gray SSPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

SPINNET™ SD COMPONENTS

SPINNET™ BODY NOZZLE	
90 l/h, Orange	64220-004100
120 l/h, Red	64220-004200
160 l/h, Brown	64220-004250
200 l/h, Yellow	64220-004300



SPINNET™ SD (SHOULDER DISTRIBUTOR) DEVICE	
090/050 Orange	63000-014250
120/070 Red	63000-014300
160/090 Brown	63000-014350
200/120 Yellow	63000-014400



SPINNET™ DISTRIBUTION MECHANISM	
LR, long range distribution model, Green swivel	64200-001020
FLT, flat distribution model, Gray swivel	64200-001000
SR, short range distribution model, Blue swivel	64200-001030





VIBRONET™

APPLICATIONS

Germination tables.

SPECIFICATIONS

- Bridgeless micro emitter with vibrating action.
- Micro-emitter , 3 different flow rates : 25, 40, 50 l/h.
Nominal flow rates at 3.0 bar pressure.
- Recommended working pressure: 3.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connector: press fit.

FEATURES AND BENEFITS

- Excellent uniformity distribution on a full coverage irrigation system.
- Operation of this emitter is based on vibration, water passage through the nozzle causes needle vibration which in turn breaks up the water jet into uniform droplets that are evenly spread.
- Constantly self-cleaning, the vibrating system does not allow for build up of mineral deposits in the nozzle.
- Micro-emitter made of plastic materials resistant to all agrochemicals & weather conditions.
- Strongly recommended to connect the Vibronet™ to the distribution pipe with a SSPE (super soft PE) micro-tube, a purpose-designed weight and AD valve (anti-drain) to prevent distribution pipe drainage.

VIBRONET™ TECHNICAL DATA

MODEL	FLOW RATE (L/H)*	NOZZLE CODE COLOR	PIN CODE COLOR	NOZZLE WATER PASSAGES AREA (MM²)	RECOMMENDED WORKING PRESSURE (BAR)	CONSTANT K	EXPONENT X	WETTED DIAMETER 150 CM ABOVE GROUND* (M)
025	24.0	Brown	Black	0.38	3.0	5.2	0.45	3.0
040	40.0	Blue	Gray	0.60	3.0	8.6	0.45	4.0
050	47.0	Green	Gray	0.71	3.0	9.5	0.47	4.0

* at 3.0 bar working pressure


PACKAGING DATA

VIBRONET™	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	3200	28 x 28 x 57	19.2	32	102400	614
Complete stand, 15 cm tube w/stabilizer and AD valve	250	28 x 28 x 57	15.1	32	8000	484
Complete stand, 30 cm tube w/stabilizer and AD valve	200	28 x 28 x 57	15.0	32	6400	480
Complete stand, 60 cm tube w/stabilizer and AD valve	150	18 x 34 x 79	11.5	20	3000	230
Complete stand, 90 cm tube w/stabilizer and AD valve	200	28 x 27 x 113	15.0	16	3200	240

VIBRONET™

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

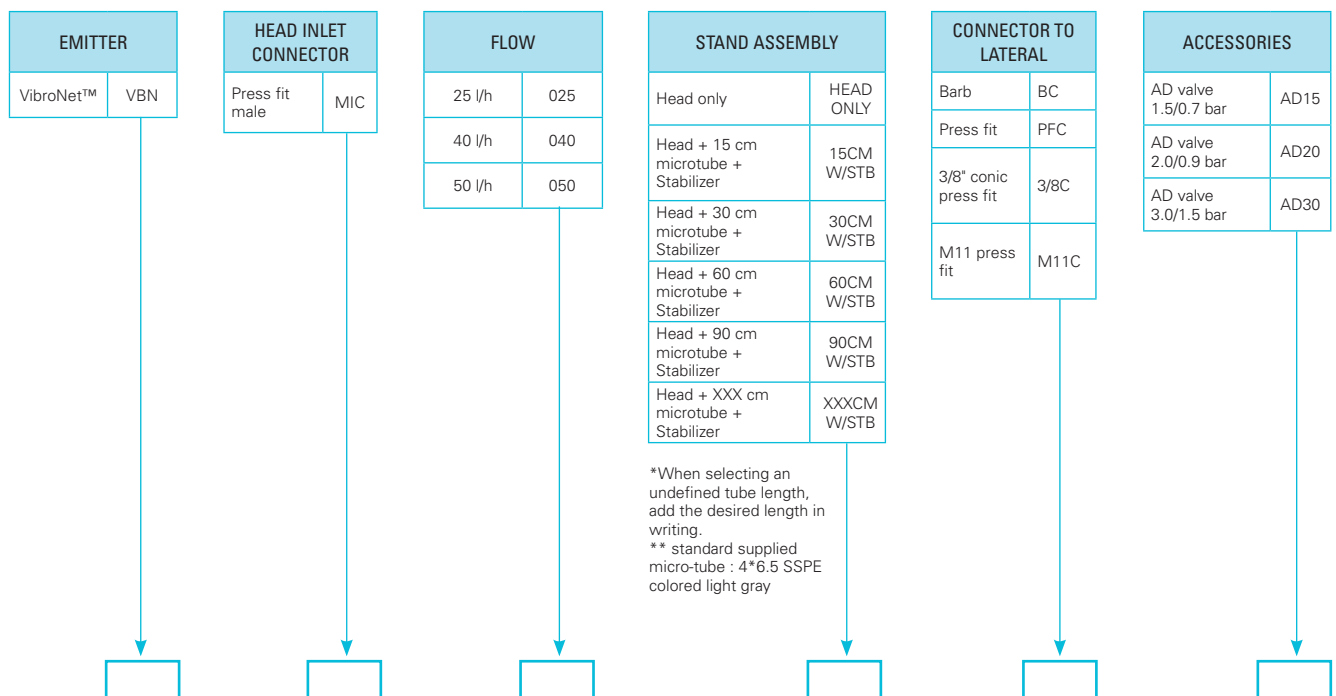


VIBRONET™

Head only

Catalog number : **64300** - (any of below 6 digits)

MODEL	1 UNIT	25 UNIT/BAG
025	000950	000955
040	001000	001010
050	005000	005010

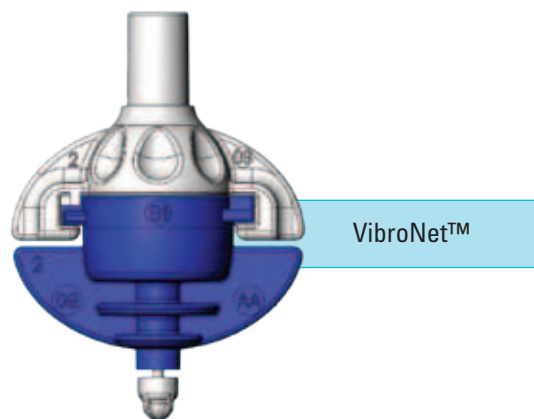

VIBRONET™

Head + AD valve 20

Catalog number : **64300** - (any of below 6 digits)

MODEL	1 UNIT	25 UNIT/BAG
025		000965
040	001070	001080
050		005110

VIBRONET™ ASSEMBLY STANDS

VibroNet™ , UD stand, Flow YYY, micro-tube length XXX , stabilizer, barb connector to lateral pipe , AD valve 20

Catalog number : **64300** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
025		000800		
040	001600	002400	003400	003700
050			005120	

VibroNet™ , UD stand, Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 20

Catalog number : **64300** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
025				
040	001700	002500	003500	
050				

VibroNet™ , UD stand, Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 15

Catalog number : **64300** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
025				
040	001200	002000	003000	
050				

VibroNet™ , UD stand, Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 15

Catalog number : **64300** - (any of below 6 digits)


MODEL	15 CM	30 CM	60 CM	90 CM
025				
040	001300	002100	003100	
050				

Missing catalog numbers available upon request.

Background color defines the code color of the respective pin. All assembly stands include 4*6.5 mm gray SSPE micro-tube.

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.

VIBRONET™ COMPONENTS

VIBRONET™ BODY	
Catalog Number: 64320-003000	

VIBRONET™ "O" RING	
Catalog Number: 63520-005700	

VIBRONET™ NOZZLE MECHANISM	
025 Brown + Black pin	64320-004200
040 Blue + Gray pin	64320-004300
050 Green + Gray pin	64320-004400



COOLNET™ PRO

SUPER-FINE MISTER



APPLICATIONS

Super-fine static mister especially designed for cooling and humidifying greenhouses and livestock, and for irrigating over rooting tables.

SPECIFICATIONS

- Bridgeless design.
- Static mister, 2 different flow rates: 5.5, 7.5 l/h and a plugged nozzle.
Nominal flow rates at 4.0 bar pressure.
- Pressure range 3.0 - 5.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connector:
Press fit
- 3 different configurations:
Cross, 4 nozzles
"T" , 2 nozzles
Straight, 1 nozzle
- The nozzles are code color colored:
5.5 l/h Light Green
7.5 l/h Silver Gray
Plugged nozzle: Orange

FEATURES AND BENEFITS

- Bridgeless design eliminates dripping.
- Interchangeable components.
- Acid resistant (AA) raw materials, thus allowing the application chemicals to pass through the system. The system can be cleaned by application of suitable acid treatments.
- Micro sized droplets, at a relatively low pressure of 4.0 bar the CoolNet™ Pro uniformly distributes an average drop size of 65 micron.
- Specially designed for cooling, humidifying and rooting tables.
- Strongly recommended to connect the CoolNet™ Pro to the distribution pipe with a SSPE (super soft PE) micro-tube, a specifically designed stabilizer and AD valve (anti-drain) that will prevent distribution pipe drainage.

COOLNET™ PRO TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	RECOMMENDED WORKING PRESSURE (BAR)	CONSTANT K	EXPONENT X
055	Light Green	0.51	4.0 to 5.0	1.03	0.45
075	Silver Gray	0.61	4.0 to 5.0	1.40	0.45


PACKAGING DATA

COOLNET™ PRO	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head , cross unit with male conn	750	18 x 34 x 79	11.0	20	15000	220
Complete stand (30 cm) w/stabilizer & AD valve	125	28 x 28 x 57	8.4	32	4000	269
Complete stand (60 cm) w/stabilizer & AD valve	100	18 x 34 x 79	8.2	20	2000	185
Head , T unit with male conn	1000	28 x 28 x 57	14.8	32	32000	474
Complete stand (30 cm) w/stabilizer & AD valve	150	28 x 28 x 57	9.9	32	4800	317
Complete stand (60 cm) w/stabilizer & AD valve	100	18 x 34 x 79	8.2	20	2000	173
Head , one outlet	5000	18 x 34 x 79	21.5	20	100000	430

COOLNET™ PRO

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

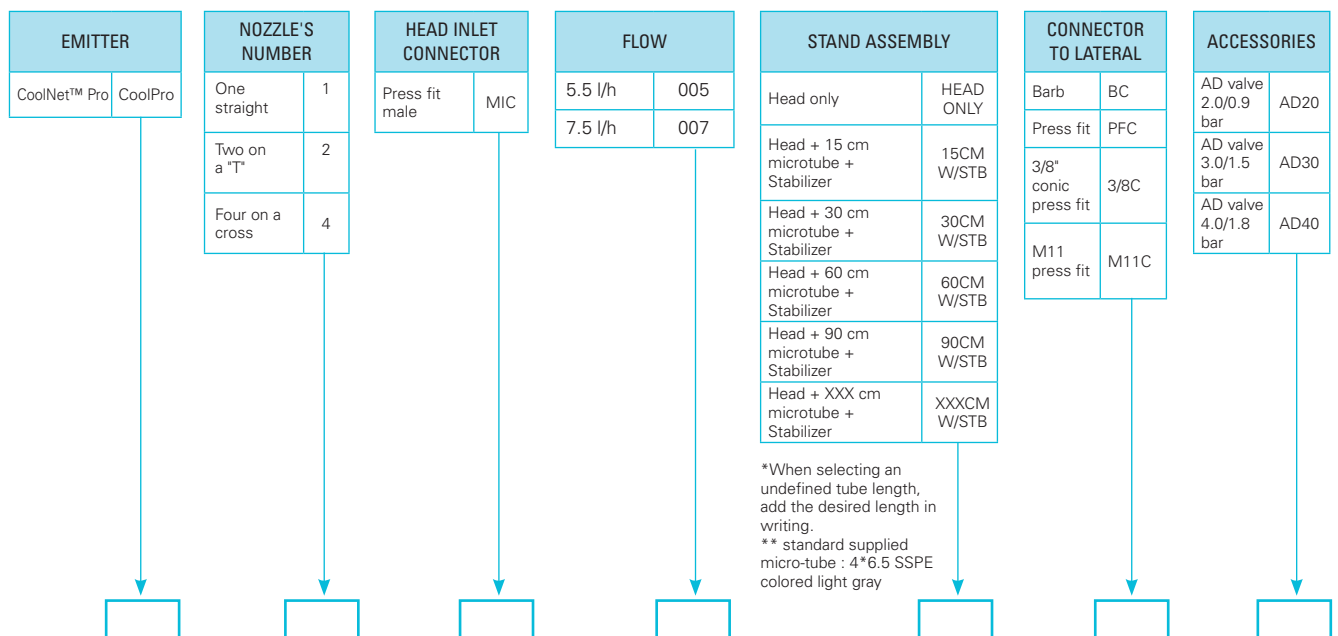


COOLNET™ PRO

Head only (with male inlet connector)

Catalog number: **63100** - (any of below 6 digits)

MODEL	SINGLE	TEE	CROSS
	"S"	"T"	"C"
055	048600	050000	052000
075	054000	056300	058300




CoolNet™ Pro Single

COOLNET™ PRO


head + AD valve 40

Catalog number: **63100** - (any of below 6 digits)

MODEL	SINGLE	TEE	CROSS
	"S"	"T"	"C"
055	049420	050010	052200
075			058500



CoolNet™ Pro Tee



CoolNet™ Pro Cross

COOLNET™ PRO ASSEMBLY STANDS

CoolNet™ Pro , UD stand, model "S" , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055	049000	049400		
075	054300	055100		

CoolNet™ Pro , UD stand, model "S" , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055				
075	054600	055800		

CoolNet™ Pro , UD stand, model "T" , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe , AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055	050300	050700		
075	056700	057100		

CoolNet™ Pro , UD stand, model "T" , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055		050900	051100	
075		057300		

CoolNet™ Pro , UD stand, model "C" , Flow YYY , micro-tube length XXX , stabilizer , barb connector to lateral pipe, AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055	052400	053100	053960	053980
075	058900	059600	069960	

CoolNet™Pro , UD stand, model "C" , Flow YYY , micro-tube length XXX , stabilizer , press-fit connector to lateral pipe , AD valve 40 , Catalog number : **63100** - (any of below 6 digits)

MODEL	15 CM	30 CM	60 CM	90 CM
055	052700	053500	053965	
075	059200	060000	070200	

Missing catalog numbers available upon request. All assembly stands include 4*6.5 mm gray SSPE micro-tube.
Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement.



MISTNET™

APPLICATIONS

Fine static mister especially designed for under canopy cooling and humidifying greenhouses.

SPECIFICATIONS

- Bridgeless design eliminates dripping.
- Static mister, 2 flow rates: 15, 25 l/h.
Nominal flow rates at 2.7 bar pressure.
- Pressure range 2.5 to 5.0 bar.
- Recommended filtration : 130 micron / 120 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connectors:
Press fit
- the nozzles are code color colored:
15.0 l/h Yellow
25.0 l/h Brown

FEATURES AND BENEFITS

- Bridgeless design eliminates dripping.
- Interchangeable components.
- Acid resistant (AA) raw materials, thus allowing the application chemicals to pass through the system. The system can be cleaned by application of suitable acid treatments.
- Micro sized droplets, at a relatively low pressure of 3.0 bar the MistNet™ uniformly distributes an average drop size of 150 micron.
- Specially designed for under canopy cooling and humidifying systems.

MISTNET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE DIA. (MM)	CONSTANT K	EXPONENT X	RECOMMENDED WORKING PRESSURE (BAR)
015	Yellow	1.10	3.30	0.46	3.0
025	Brown	1.30	5.40	0.46	3.0


PACKAGING DATA

MISTNET™	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	4500	18 x 34 x 79	19.5	20	90000	390
Complete stand, 60 cm tube w/stake	100	18 x 34 x 79	7.3	20	2000	159
Complete stand, 60 cm tube w/o stake	300	18 x 34 x 79	15.8	20	6000	329
Complete stand, 90 cm tube w/stake	150	28 x 27 x 113	6.8	16	2400	193
Complete stand, 90 cm tube w/o stake	300	28 x 27 x 113	13.8	16	4800	221

MISTNET™

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

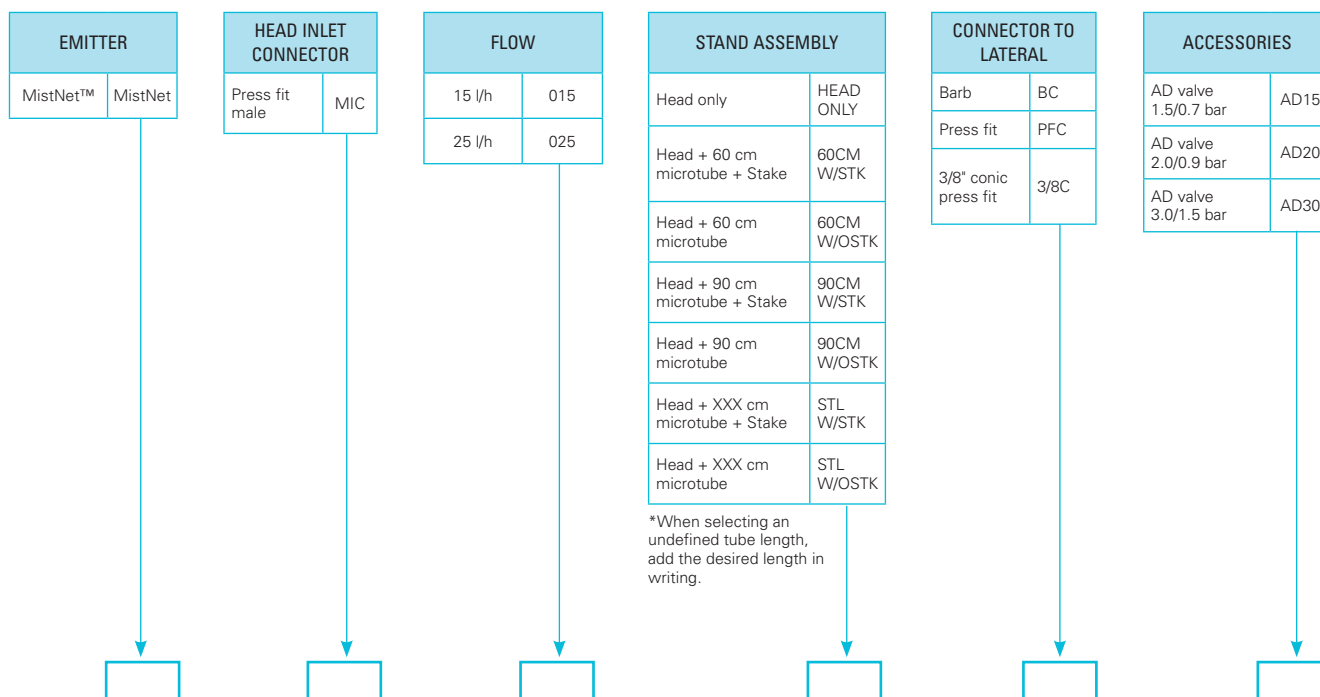


MISTNET™

Head only (with male inlet connector)

Catalog number: **63100** - (any of below 6 digits)

MODEL	SINGLE	SINGLE
	"S"	"S" 100units/bag
015	040100	040120
025	040000	040020



MistNet™

Missing catalog numbers available upon request

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement

COOLNET™ PRO AND MISTNET™ COMPONENTS

COOLNET™ PRO CROSS
BODY




63120-001700

COOLNET™ PRO "T"
BODY



63120-001500

COOLNET™ PRO AND
MISTNET™ "S" BODY



63120-001600

COOLNET™ PRO NOZZLE



5.5 Light Green: 63120-003000
7.5 Silver Gray: 63120-003200

COOLNET™ PRO PLUGGED NOZZLE



Plugged nozzle, Orange: 63120-001850

MISTNET™ NOZZLE



15.0 Yellow: 63120-004000
25.0 Brown: 63120-002500

COOLNET™ PRO AND
MISTNET™ "O" RING



63120-001000

COOLNET™ PRO AND
MISTNET™ DIFFUSER



63120-001800

MALE/MALE CONNECTOR ,
COLORED LIGHT GRAY



63000-001450

MICRO-SPRINKLERS AND MICRO-EMITTERS UPSIDE-DOWN STANDS COMPLEMENTARY ACCESSORIES

AD VALVE , MALE/FEMALE Blue pin – 1.5 bar/0.7 bar 63000-002980 Purple pin – 2.0 bar/0.9 bar 63000-003000 Green pin – 3.0 bar/1.5 bar 63000-003100 Orange pin – 4.0 bar/1.8 bar 63000-003200		STABILIZER 63000-002910		M11 THREADED/FEMALE CONNECTOR (GRAY) + ASSEMBLY FINGER FILTER 63000-002180	
AD VALVE , BARB/BARB Blue pin – 1.5 bar/0.7 bar 63000-003303 Purple pin – 2.0 bar/0.9 bar 63000-003305 Green pin – 3.0 bar/1.5 bar 63000-003310 Orange pin – 4.0 bar/1.8 bar 63000-003315		BARB/FEMALE CONNECTOR (GRAY) 63000-001950		PLUG (BLUE) 63000-002400	
AD VALVE , 3/8" CONIC THREADED/BARB Blue pin – 1.5 bar/0.7 bar 63000-003250 Purple pin – 2.0 bar/0.9 bar 63000-003230 Green pin – 3.0 bar/1.5 bar 63000-003270 Orange pin – 4.0 bar/1.8 bar 63000-003290		BARB/MALE CONNECTOR (GRAY) 63000-002060		BARBED PRESSURE MEASURING POINT 63000-002800	
AD VALVE , 3/8" CONIC THREADED/BARB + ASSEMBLY FINGER FILTER Blue pin – 1.5 bar/0.7 bar 63000-003260 Purple pin – 2.0 bar/0.9 bar 63000-003240 Green pin – 3.0 bar/1.5 bar 63000-003280 Orange pin – 4.0 bar/1.8 bar 63000-003295		BARB/BARB CONNECTOR (GRAY) 63000-001350		1/4" UNF MALE THREADED, PRESSURE MEASURING POINT. ON A PVC PIPE, DRILL: 5.2 MM SCREW-TAP: 1/4-28 UNF 63000-002700	
FINGER FILTER 63000-001060		MALE/MALE CONNECTOR (GRAY) 63000-001450		1/8" BSP MALE THREADED, PRESSURE MEASURING POINT. ON A PVC PIPE, DRILL: 8.5 MM SCREW-TAP: 1/8-28 BSP 63000-002750	
BARB/FLAT FEMALE CONNECTOR 63000-002450		3/8" CONIC THREADED/ FEMALE CONNECTOR (GRAY) 63000-002120		SCREEN FILTER CONNECTOR 63000-003400	
		3/8" CONIC THREADED/ FEMALE CONNECTOR (GRAY) + ASSEMBLY FINGER FILTER 63000-002140		"T" FEMALE/FEMALE/ FEMALE (GRAY) 63000-000910	
		M11 THREADED/FEMALE CONNECTOR (GRAY) 63000-002170		MALE/MALE ADAPTER TO "DAN" STANDS (BLUE) 63000-002600	
				FEMALE/FEMALE ADAPTER TO "DAN" STANDS (BLUE) 63000-002500	



GYRONET™ TURBO

APPLICATIONS

Closed and open-air nurseries.
Intensive field crops.
Overhead cooling.
Roof and tunnel cooling and dust cleaning.

SPECIFICATIONS

- Very robust micro-sprinkler.
- Micro-sprinkler, 5 different flow rates: 200, 250, 300, 400, 500 l/h.
Nominal flow rates at 2.2 bar pressure.
- Maximum recommended working pressure: 3.0 bar.
- Recommended filtration : 200 micron / 80 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- Inlet connector:
1/2" threaded male
- The rotor is colored Purple.

FEATURES AND BENEFITS

- Anti-ant mechanism prevents insect penetration into the area of the sprinklers nozzle.
- Sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for full coverage irrigation where optimal uniformity distribution of water is required.
- Low bridge "shade", to improve uniformity distribution.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service.

GYRONET™ TURBO TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED DIAMETER 100 CM ABOVE GROUND (M)	SWIVEL (ROTOR) CODE COLOR
200	Yellow	1.89	42.5	0.5	3.0	10.0	Purple
250	Purple	2.14	54.5	0.5	3.0	10.0	Purple
300	Green	2.31	64.1	0.5	3.0	11.5	Purple
400	Blue	2.67	86.8	0.5	3.0	12.0	Purple
500	Brown	3.00	108.5	0.5	3.0	12.5	Purple


PACKAGING DATA

GYRONET™ TURBO	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	500	18 x 34 x 79	10.4	20	10000	220
Complete stand (120 cm) w/o stake	75	17 x 26 x 139	9.5	15	1125	153

GYRONET™ TURBO

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

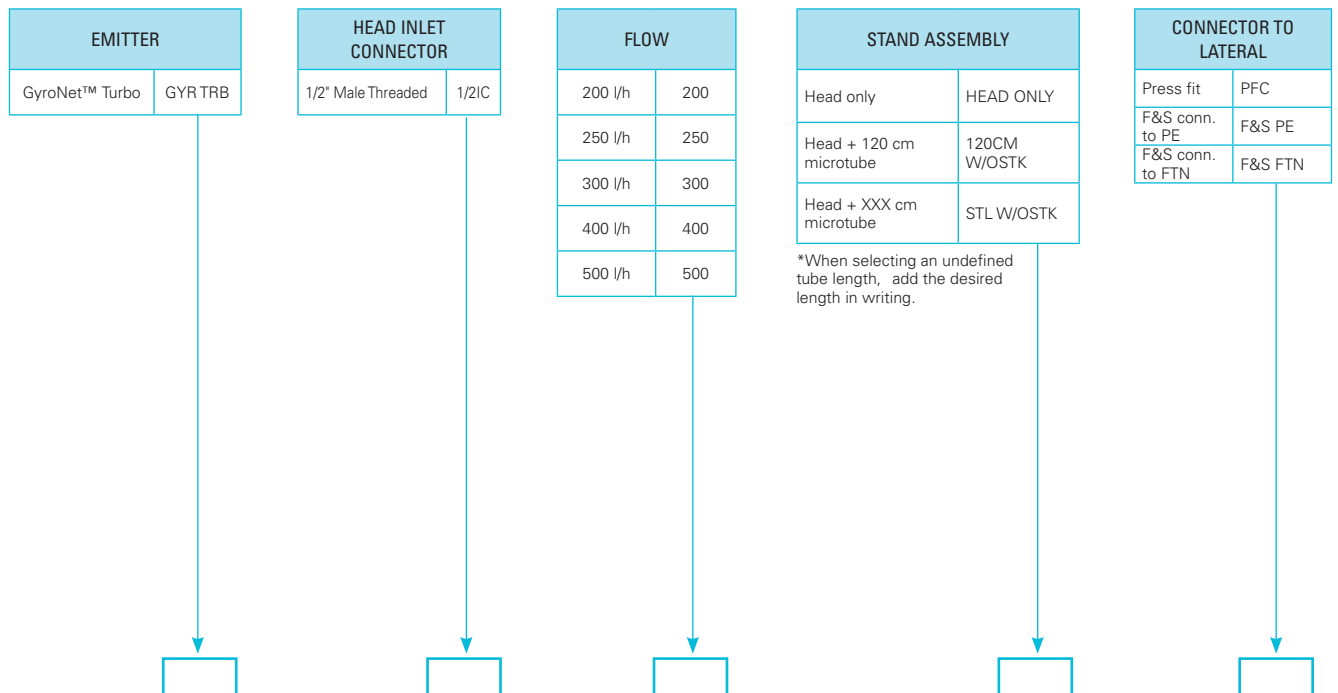


GYRONET™ TURBO

Head only

Catalog number: **64100** - (any of below 6 digits)

MODEL	1 UNIT	25 UNITS/BAG	100 UNITS/BAG
200	002040	002010	002070
250	003050		003080
300	004040	004050	004070
400	004940		
500	006000		

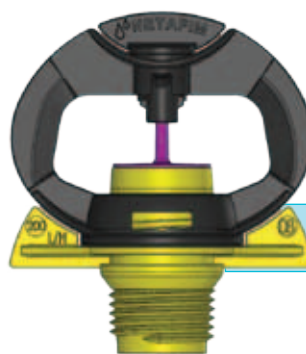

GyroNet™ Turbo

GYRONET™ TURBO ASSEMBLY STANDS

GyroNet™ Turbo , Flow YYY , micro-tube ZZ XXX cm length , adapter sprinkler housing , without stake , press-fit connector to lateral pipe , Catalog number : **64100** - (any of below 6 digits)

MODEL	6*8 MM - 100 CM	9*12 MM - 100 CM	9*12 MM - 120 CM
200	002200	002300	002350
250	003200	003300	003380
300	004200	004300	004350
400			
500			

Missing catalog numbers available upon request

Assembly stands include 6*8 mm or 9*12 mm black SPE micro-tube

Other stand combinations can be ordered based on the attached flowchart which can help determine the desired product requirement

GYRONET™ TURBO COMPONENTS

GYRONET™ TURBO UPPER BEARING		GYRONET™ TURBO BRIDGE		GYRONET™ TURBO SWIVEL + ASSEMBLY SLEEVE	
64120-001750		64120-002000		64120-001575	

GYRONET™ TURBO nozzles

Catalog number : **64120** - (any of below 6 digits)

GYRONET™ TURBO BODY NOZZLE	
200, Yellow	001000
250, Purple	001100
300, Green	001200
400, Blue	001280
500, Brown	001350





MEGANET™

ROTATING IMPACT SPRINKLER



APPLICATIONS

High water trajectory angle - for vegetables and open field crops , open field nurseries, crops germination, frost fighting, cooling fruit orchards and roof dust cleaning.

Low water trajectory angle - for under tree irrigation and shade/net houses.

SPECIFICATIONS

- Sprinkler, 7 different nominal flow rates: 200, 250, 350, 450, 550, 650, 750 l/h.
Nominal flow rates at 2.3 bar pressure.
- Recommended working pressure: 2.0 to 3.0 bar (at the sprinkler head).
- Recommended filtration: 400 micron / 40 mesh.
Filtration method is to be selected based on the kind and concentration of the dirt particles existing in the water. Wherever sand exceeding 2 ppm exists in the water, a Hydro-cyclone filter is to be installed before the main filter. When sand/ silt/ clay solids exceed 100 ppm, pre treatment will be applied according to Netafim™ expert team's instructions.
- 2 types of water trajectory:
High, 24 degrees
Low, 15 degrees
- Inlet connector: 1/2" male threaded.
- Code colored locking pins and caps for easy identification.
- 2 balanced water jets.
- Individual filter in each sprinkler.
- MegaNet™ sprinklers meet ISO 8026 standards (SI 1406) with production certified by the Israel Standards Institute (SII).

FEATURES AND BENEFITS

- Two equal water jets assure perfectly balanced performance of the sprinkler without pushing it backwards.
- The closed and compact structure provides robustness to the sprinkler while preventing insect penetration into the nozzle and protecting mechanism parts during sprinkler conveyance.
- Each sprinkler unit has an individual filter to assure nozzle cleanliness and simplify cleaning when needed.
- The sprinkler is color-coded to easily distinguish it. Cap color denotes sprinkler flow rate, locking pin color denotes trajectory angle.
- Sprinkler's distribution uniformity which is respective to its flow rate and placement spacing, is of the highest in the market.
- Can be installed on solid sets or in removable field stands.
- Made of UV-protected materials, durable to all climate conditions and nutrients injected in agricultural applications.

MEGANET™ TECHNICAL DATA

MODEL	NOZZLE CODE COLOR	NOZZLE SIZE (MM)	CONSTANT K	EXPONENT X	MAXIMUM WORKING PRESSURE (BAR)	WETTED DIAMETER (M) 100 CM ABOVE GROUND TRAJECTORY ANGLE 24D PIN CODE COLOR BLACK	WETTED DIAMETER (M) 50 CM ABOVE GROUND TRAJECTORY ANGLE 15D PIN CODE COLOR GRAY
200	Yellow	1.85	42.0	0.5	3.0	12.0	14.0
250	Purple	2.06	51.6	0.5	3.0	13.0	14.0
350	Green	2.44	72.3	0.5	3.0	14.0	14.0
450	Blue	2.79	92.2	0.5	3.0	16.0	14.0
550	Brown	3.08	110.5	0.5	3.0	17.0	14.0
650	Orange	3.37	135.6	0.5	3.0	17.0	15.0
750	Red	3.68	157.0	0.5	3.0	17.0	16.0


PACKAGING DATA

MEGANET™	QUANTITY P/BOX UNITS	BOX SIZE (CM X CM X CM)	BOX WEIGHT (KG)	BOXES P/PALLET	TOTAL UNITS P/PALLET	PALLET WEIGHT (KG)
Head only	200	18 x 34 x 79	11.0	20	4000	232

MEGANET™

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

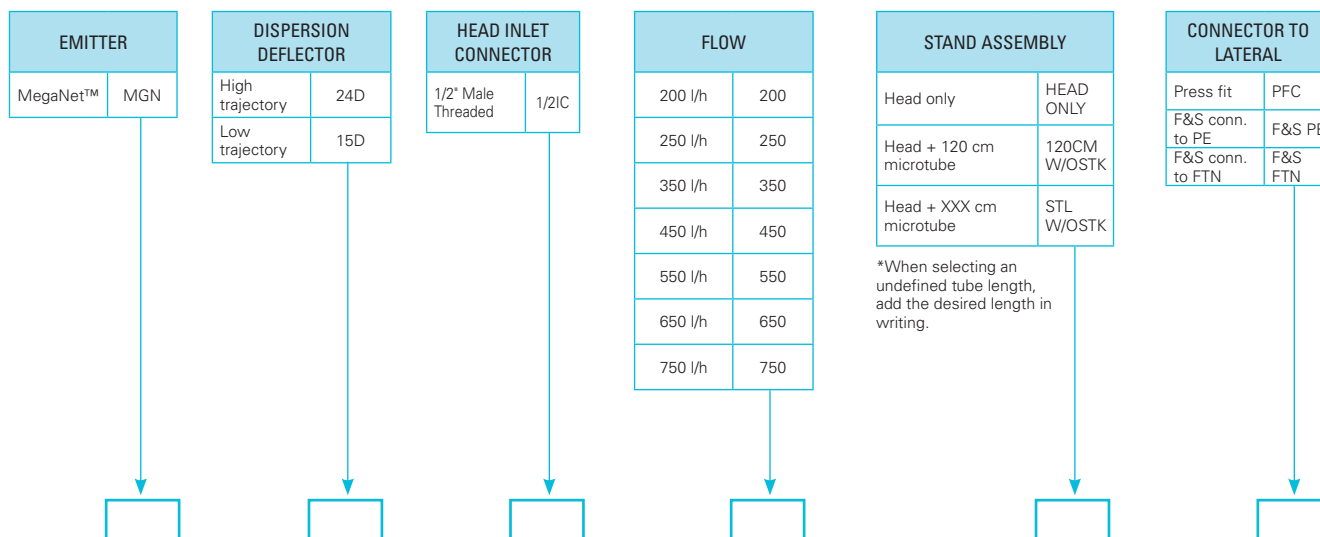

MEGANET™

Head only

Catalog number: **63600** - (any of below 6 digits)

MODEL	1/2" THREADED INLET CONNECTOR		20 MM ISO INLET CONNECTOR		1/2" ASTM INLET CONNECTOR		1/2" THREADED INLET CONNECTOR + AD	
								
	24D	15D	24D	15D	24D	15D	24D	15D
200	001700	004900						
250	001750	004950						
350	001000	005000					001900	
450	002000	006000		010100		010500	002010	005010
550	003000	007000		010200		010600	003010	006010
650	004000	008000					004010	
750	004500	009000					004510	

Missing catalog numbers available upon request

MEGANET™ COMPONENTS

MegaNet™ top mechanism

Catalog number : **63620** - (any of below 6 digits)

MODEL	24D	15D
		
200	008100	007400
250	008150	007450
350	008200	007500
450	008300	007600
550	008400	007700
650	008500	007800
750	008600	007620

MegaNet™ complete upper body

Catalog number : **63620** - (any of below 6 digits)

MODEL	24D	15D
		
200	009700	008900
250	009750	008950
350	009800	009000
450	009900	009100
550	010000	009200
650	010100	009300
750	010200	009400

MEGANET™ 1/2" THREADED INLET BODY		MEGANET™ C20MM ISO GLUED INLET BODY		MEGANET™ C1/2" ASTM GLUED INLET BODY	
63620-004200		63620-004190		63620-004150	

MEGANET™ FILTER		MEGANET™ SERVICE KEY		MEGANET™ ROAD GUARD	
63620-004400		63620-004500		63620-007000	

SPRINKLERS STANDS COMPLEMENTARY ACCESSORIES CONNECTORS AND STAND ACCESSORIES


COMPLETE STAND W/O STAKE SPRINKLER HOUSING + 1.2 METER 6*8 TUBE + BARB/MALE CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB CONN. + STAKE ADAPTER THAT FIT A 6 MM ROD		COMPLETE STAND W/O STAKE SPRINKLER HOUSING + 1.2 METER 9*12 TUBE + BARB/MALE CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB CONN. + STAKE ADAPTER THAT FIT A 8 MM ROD	
64520-002000		64520-002300	
SPR STAND 9*12 120CM W/OSTK F&S PE DP8. SPRINKLER HOUSING + 1.2 METER 9*12 TUBE + BARB/MALE F&S CONN. + LOCKING SLEEVE, THESE 4 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB F&S CONN. + STAKE ADAPTER THAT FIT A 8 MM ROD		SPR STAND 9*12 120CM W/OSTK F&S FTN DP8 SPRINKLER HOUSING + 1.2 METER 9*12 TUBE + BARB/MALE F&S CONN. + LOCKING SLEEVE, THESE 4 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/1/2" MALE THREADED F&S CONN. + STAKE ADAPTER THAT FIT A 8 MM ROD	
64520-002270		64520-002275	
COMPLETE STAND W/O STAKE SPRINKLER HOUSING + 1.2 METER 16 MM (ID 13.2 MM - 1.4 MM WALL THICKNESS) TUBE + BARB/ TUBE + BARB/MALE CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB CONN. + STAKE ADAPTER THAT FIT A 8 MM ROD			
64520-002450			
COMPLETE STAND W/O STAKE FEMALE PRESS FIT CONN. + 0.6 METER 6*8 TUBE + BARB/MALE CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB CONN. + STAKE ADAPTER THAT FIT A 6 MM ROD		COMPLETE STAND W/O STAKE FEMALE PRESS FIT CONN. + 1.2 METER 9*12 TUBE + BARB/MALE CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB CONN. + STAKE ADAPTER THAT FIT A 6 MM ROD	
64020-005600		64020-006000	
COMPLETE STAND W/O STAKE FEMALE PRESS FIT CONN. + 1.2 METER 9*12 TUBE + BARB/MALE F&S CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/BARB S&F CONN. + STAKE ADAPTER THAT FIT A 6 MM ROD		COMPLETE STAND W/O STAKE FEMALE PRESS FIT CONN. + 1.2 METER 9*12 TUBE + BARB/MALE F&S CONN., THESE 3 PRODUCTS ARE SUPPLIED ASSEMBLED, AND AS SEPARATED PRODUCTS IN THE SAME BOX: FLAT FEMALE/1/2" MALE THREADED S&F CONN. + STAKE ADAPTER THAT FIT A 6 MM ROD	
64020-006100		64020-006150	
MEGA-RISER 1/2" 0.4 METER LENGTH 1/2" MALE THREADED - 1/2" FEMALE THREADED		MEGA-SUPPORTING ARM	
64520-002490		64520-002485	
		MEGA-BASE	
		64520-002480	

SPR STAND F&S CONN FEMALE/BARB BROWN 65080-005010		SPR STAND F&S CONN FEMALE/ 1/2" MTH 65080-005210		1/2" FEMALE THREADED SPRINKLER HOUSING / BARB For tube 6*8 64520-002100 For tube 9*12 65080-002825 For tube 16 mm (ID 13.2 mm - 1.4 mm wall thickness) 65080-002830	
SPR STAND QUICK CONN MALE/BARB 12*0" RING 65080-005060		SPR STAND F&S CONN LOCKING SLEEVE 12 65080-005090			
MALE / BARB CONNECTOR For tube 6*8 64520-002200 For tube 9*12 65080-002871 For tube 16/4 65080-002875		SPRINKLER SOCKET 1/2" / 1/2" Sprinkler socket 65080-004500 3/4" / 1/2" Sprinkler reducer coupling 65080-004600		START CONNECTOR TO PE Barb for tube 9*12 32500-003705 Barb for tube 16 mm 32500-013750	
FLAT FEMALE / BARB CONNECTOR 65080-002600		MALE PLUG 65080-002880		START CONNECTOR TO PVC Barb for tube 9*12 32500-003706 Barb for tube 16 mm 32500-013770	
HOUSING ADAPTER Housing adapter to 6 mm rod (Blue) 63520-005950 Housing adapter to 8 mm rod (Black) 63520-005970		3/4" X 1/2" IN-LINE PRESSURE REGULATOR 31000-002200			
METAL ROD 6 mm diameter , 100 cm length 65080-001100 6 mm diameter , 120 cm length 65080-001200 8 mm diameter , 100 cm length 65080-001600 8 mm diameter , 120 cm length 65080-001700				REDUCTION NIPPLE 3/4" MALE - 1/2" MALE 78220-007700	
				BUSHING CONNECTOR 3/4" MALE - 1/2" FEMALE 78220-004100	





NETAFIM™ FLEXIBLE PIPES POLYNET™ AND FLATNET™

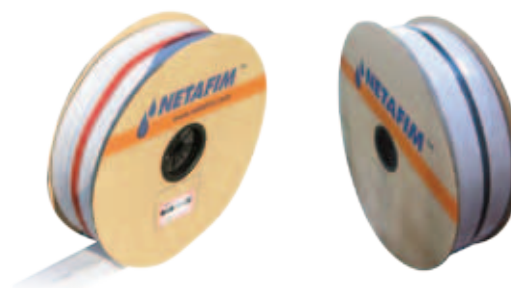

The industry's ideal piping solutions for mainline and distribution laterals applications.

High-performance and cost-efficient products, PolyNet™ and FlatNet™ features unique integral welded outlets that lower installation costs while ensuring a secure, leakage-free connection between distribution pipes and laterals.

Available in a wide range of diameters, Netafim's flagship pipe addresses the design requirements of any on-surface or subsurface irrigation deployment.

A thermostatic collapsible irrigation pipe constructed from premium polyethylene (PE), offers many advantages over other pipe solutions.

They are highly portable, flexible and light weight, thereby reducing manpower, freight, maintenance and storage requirements.

Are also versatile and durable, enabling it to withstand the most stringent climatic and environmental conditions.

The comprehensive Netafim™ flexible pipes solutions are equipped with connector kits and an array of branching and lateral fittings, making them compatible with all Netafim™ systems. Requiring no specialized installation tools and designed for Netafim's industry-leading recoiling machinery, the user – friendly Netafim™ flexible pipes are extremely easy to layout and recoil. Rounding out Netafim's industry-leading drip irrigation offering, they are a cost-effective piping solution that meets the diverse needs of professional growers worldwide.

FLATNET™

	DISTANCE BETWEEN OUTLETS	COIL LENGTH 50 METER	COIL LENGTH 100 METER
2"/51mm	5.0	43000-007200	43000-007220
3"/78mm	5.0	43000-008735	43000-010225

		COIL LENGTH 48 METER	COIL LENGTH 96 METER
2"/51mm	6.0		
3"/78mm	6.0	43000-008752	43000-010250

		COIL LENGTH 45.5 METER	COIL LENGTH 97.5 METER
2"/51mm	6.5		
3"/78mm	6.5	43000-008760	43000-010260

		COIL LENGTH 49 METER	COIL LENGTH 98 METER
2"/51mm	7.0		
3"/78mm	7.0	43000-008770	43000-010270

		COIL LENGTH 48 METER	COIL LENGTH 96 METER
2"/51mm	8.0	43000-007264	43000-007275
3"/78mm	8.0	43000-008780	43000-010276

		COIL LENGTH 45 METER	COIL LENGTH 99 METER
2"/51mm	9.0	43000-007285	43000-007288
3"/78mm	9.0	43000-010310	43000-010320

		10.00 M BETWEEN CONN. 50 METER	10.00 M BETWEEN CONN. 100 METER
2"/51mm	10.0	43000-007320	43000-007360
3"/78mm	10.0	43000-008800	43000-010300

POLYNET™

	DISTANCE BETWEEN OUTLETS	COIL LENGTH 50 METER	COIL LENGTH 100 METER
2"/51mm	5.0		
3"/78mm	5.0		

		COIL LENGTH 48 METER	COIL LENGTH 96 METER
2"/51mm	6.0		
3"/78mm	6.0		

		COIL LENGTH 45.5 METER	COIL LENGTH 97.5 METER
2"/51mm	6.5		
3"/78mm	6.5		

		COIL LENGTH 49 METER	COIL LENGTH 98 METER
2"/51mm	7.0		
3"/78mm	7.0		

		COIL LENGTH 48 METER	COIL LENGTH 96 METER
2"/51mm	8.0	43000-016200	43000-016250
3"/78mm	8.0		

		COIL LENGTH 45 METER	COIL LENGTH 99 METER
2"/51mm	9.0		
3"/78mm	9.0		

		10.00 M BETWEEN CONN. 50 METER	10.00 M BETWEEN CONN. 100 METER
2"/51mm	10.0	43000-017350	43000-017390
3"/78mm	10.0		

Missing catalog numbers available upon request

Different coil lengths achieve the need to supply at the beginning and the end of the coil "half" the distance between outlets

MICRO-TUBES AND TUBES, COMPLEMENTARY ACCESSORIES

SPE 6*8 MM BLACK MICRO-TUBE	
100 meter coil	40000-006510
200 meter coil	40000-006560
500 meter coil	40000-006580



SPE 9*11 MM BLACK MICRO-TUBE	
100 meter coil	40000-007510
500 meter coil	40000-007550



SPE 9*12 MM BLACK MICRO-TUBE	
100 meter coil	40000-005530



SPE 6*8 MM BLACK MICRO-TUBE	
60 cm length 40000-006160	
100 cm length 40000-006210	
120 cm length 40000-006260	
120 cm length 40000-006310	
150 cm length 40000-006360	

SPE 9*11 MM BLACK MICRO-TUBE PIECES	
60 cm length 40000-007001	
90 cm length 40000-007050	
120 cm length 40000-007080	
150 cm length 40000-007110	

SPE 9*12 MM BLACK MICRO-TUBE PIECES	
60 cm length 40000-005460	
90 cm length 40000-005480	
100 cm length 40000-005490	
120 cm length 40000-005510	
150 cm length 40000-005520	
200 cm length 40000-005525	

PE 16 MM BLACK PIPE (13.2 MM ID - 1.4 MM WT)	
200 meter coil	40500-001490



SPE 4*6.5 MM BLACK MICRO-TUBE COILS	
200 meter coil	40000-004800
500 meter coil	40000-004900



PE 16 MM BLACK PIPE (13.2 MM ID - 1.4 MM WT) PIECES	
120 cm length 40500-001480	

SPE 4*6.5 MM BLACK MICRO-TUBE PIECES	
30 cm length 40000-005040	
45 cm length 40001-003440	
60 cm length 40000-005100	
75 cm length 40001-003460	
90 cm length 40000-005170	
120 cm length 40000-005260	
150 cm length 40000-005340	

SPE 4*6.5 MM BLACK MICRO-TUBE PIECES + BARB CONNECTOR		SPE 4*6.5 MM BLACK MICRO-TUBE PIECES + BARB CONNECTOR + FEMALE CONNECTOR		SPE 4*6.5 MM BLACK MICRO-TUBE PIECES + MALE CONNECTOR + FEMALE CONNECTOR		SPE 4*6.5 MM BLACK MICRO-TUBE PIECES + MALE CONNECTOR	
30 cm length 63000-004100		30 cm length 63000-004000		30 cm length 63000-003700		30 cm length 63000-003600	
46 cm length 63000-004500		46 cm length 63000-004400		46 cm length 63000-004200		46 cm length 63000-005200	
60 cm length 63000-005900		60 cm length 63000-005800		60 cm length 63000-005500		60 cm length 63000-005400	
75 cm length 63000-006500		75 cm length 63000-006400		75 cm length 63000-006100		75 cm length 63000-006000	
90 cm length 63000-007200		90 cm length 63000-007100		90 cm length 63000-006800		90 cm length 63000-006700	
120 cm length 63000-008400		120 cm length 63000-008300		120 cm length 63000-008000		120 cm length 63000-007900	
150 cm length 63000-009000		150 cm length 63000-008900		150 cm length 63000-008600		150 cm length 63000-008500	

SSPE 4*6.5 MM GRAY MICRO-TUBE COILS	
200 meter coil	40000-004850
500 meter coil	40000-004950

SSPE 4*6.5 MM GRAY MICRO-TUBE PIECES		SSPE 4*6.5 MM GRAY MICRO-TUBE PIECES + BARB CONNECTOR + FEMALE CONNECTOR + ASSEMBLY STABILIZER		SSPE 4*6.5 MM GRAY MICRO-TUBE PIECES + MALE CONNECTOR + FEMALE CONNECTOR + ASSEMBLY STABILIZER	
15 cm length 40000-005020		15 cm length 63000-003570		15 cm length 63000-003550	
30 cm length 40000-005070		30 cm length 63000-004060		30 cm length 63000-003820	
46 cm length 40001-003400		46 cm length 63000-004450		46 cm length 63000-004320	
60 cm length 40000-005120		60 cm length 63000-005860		60 cm length 63000-005620	
75 cm length 40001-003420		75 cm length 63000-006450		75 cm length 63000-006220	
90 cm length 40000-005190		90 cm length 63000-007160		90 cm length 63000-006920	
120 cm length 40000-005280		120 cm length 63000-008350		120 cm length 63000-008120	
150 cm length 40000-005360		150 cm length 63000-008950		150 cm length 63000-008720	

FROSTIE
FROST FIGHTING
CONTROLLER.
SINGLE STATION VALVE
CONTROLLER POWERED BY
2 AA ALKALINE BATTERIES.
BUILT IN PRECISION
TEMPERATURE AND
HUMIDITY SENSORS.

00045-001620



MIST-GUARD
MIST CONTROLLER.
UP TO 10 VALVES 24 VAC
BUILT-IN PRECISION
TEMPERATURE AND
HUMIDITY SENSORS.

00045-001600



SUB 1 PRO
MIST CONTROLLER.
RESIDENTIAL USES.
QUICKLY GENERATE
CLIMATE FRESHER.
WATERPROOF.

73120-004600



PRODUCTS DISPLAY BOX

63000-012600



TOOLS

PUNCH 3 MM		PUNCH 8 MM		SPIRAL PUNCH 3 MM FOR 12 TO 32 MM PIPE DIAMETER	
45000-001000		45000-001400		45000-001630	
PUNCH 3 MM + INSERTER		PUNCH 8 MM + INSERTER			
45000-001320		45000-001450			
SCREW PUNCH , 8 MM		PUNCH 3 MM FOR 16 AND 20 MM PIPE DIAMETER			
45000-002400		45000-001600			
CONNECTORS AND FITTINGS INSERTER					
45000-002270					

